

FLUA®



COMET RO



The series of 17mm light outlet, provide sufficient light brightness, It's the representative of "see the light but not fitting", trimless makes the concise ceiling perfect.

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	191411A

WWW.FLUA.COM


Installation information

Area	Ceiling
Method	Recessed
Cut hole size	Φ 50mm
Embedded height	/

Technical general

System power	7.5W
Flux	285lm
Beam angle	15°
Material	Aluminum, Steel
Appearance color	PAB
Size	Φ60*53.8mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	100-240VAC
Electrical level	Class II

Photometric graph

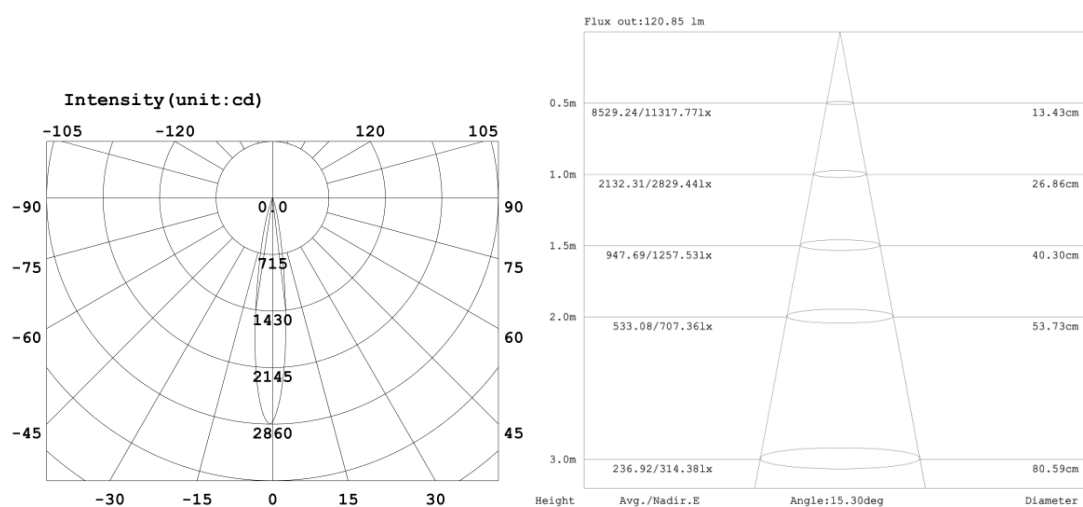

Electrical parameters

Driver brand	DRIARTE
Driver type	FLMN6W500T
Electrical installation	External

Light source parameters


Brand	CREE
Type	XHP35A
Power	5.9W
Light color	WW
Color temperature	3000K
CRI	90

Other options


Beam angle	/
Color temperature	2700K 4000K
Color	/
Appearance color	PAW

FLUA®

3D module

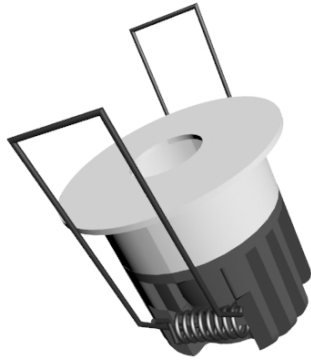

Line drawing

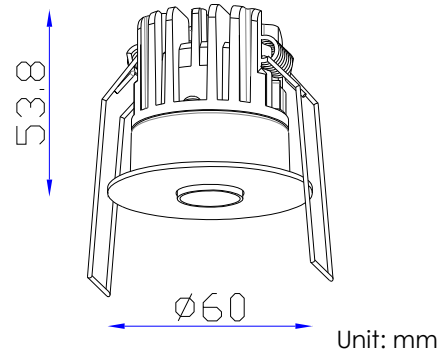

Instructions

