


FLUA®



FILOLUCE P 2

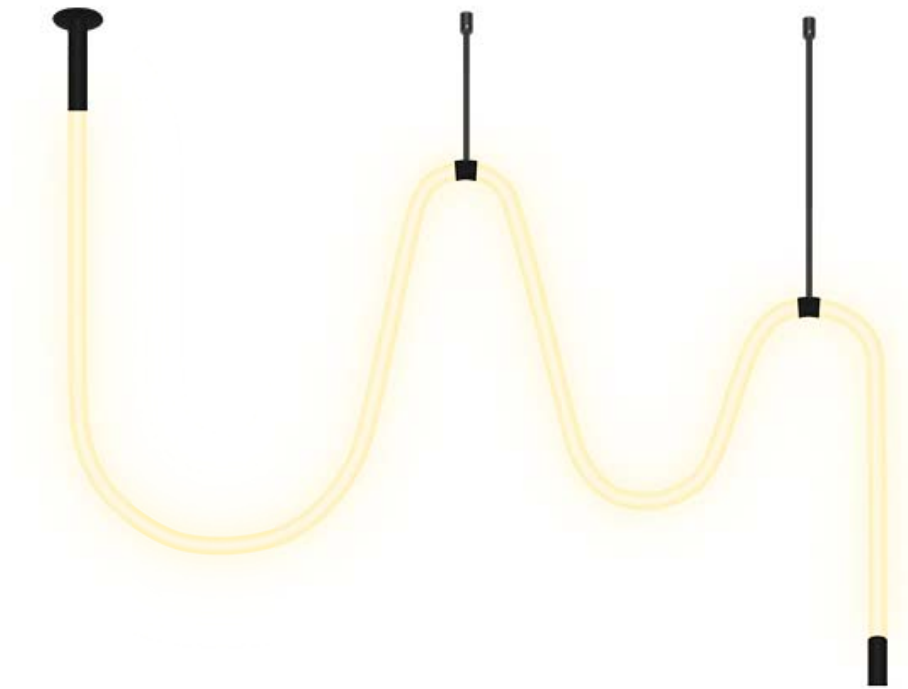

Thanks to the very unique silicon material, FILOLUCE is a linear light that is very flexible and designable for designers to create various shapes for different spaces. The diverse accessories allow users to personalize their very own FILOLUCE shape to be the wall decor or ceiling suspended art piece.

Available with tunable white and RGB version, dimmable via APP through wifi as well as the triac dim, DALI, 1-10V etc.. Ideal for residence, hotel, bars and other various interior spaces with artistic temperament.

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	331819AP

Installation information

Area	Ceiling
Method	Suspended
Cut hole size	/
Embedded height	/

Technical general

System power	86W
Flux	/
Beam angle	L
Material	Steel
Appearance color	PAB
Size	/
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	100-240VAC
Electrical level	Class II

Electrical parameters

Driver brand	DRIARTE
Driver type	FLDW5A3CHT
Electrical installation	External



Light source parameters

Brand	HONGLI
Type	FLUA-CV9-150NWW90A24IP20-GM
Power	/
Light color	WW+CW
Color temperature	2400K4700K
CRI	90

Other options

Beam angle	/
Color temperature	/
Color	/
Appearance color	PAW

3D moduleLine drawing

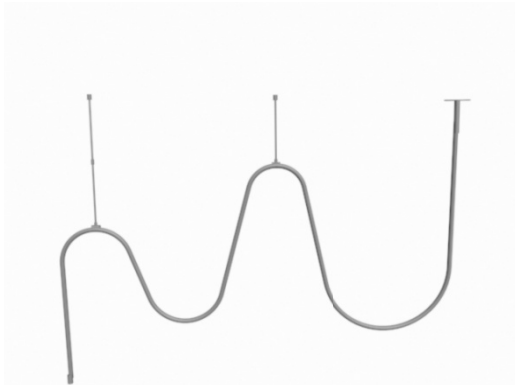

Unit: mm

Instructions

	<p>B FLUICE POLE 003065</p>	<p>1 A FLUICE P CONNECTOR 003063</p>		
<p>A FLUICE P CONNECTOR 003063</p>	<p>C FLUICE P END 003064</p>	<p>D FLUICE STRIP (S)/STRIP (W) 003067/003066</p>		
		<p>2 B FLUICE P END 003064</p>		

Instructions

100-240V AC

FILOLUCE PLATE L

FILOLUCE PLATE L RGB

FILOLUCE PLATE LAP

3

It is recommended to install the power supply next to the power box or the maintenance port.

A+B+C+D

4

5