

# FLUA®



**FORMULIA 2.0 350 TRIMLESS**



---

Slim body, three lengths optional, can support multiple combinations of installation to play your imagination, be applied to a variety of regional.

---

<b>Designer</b>	KH-W
<b>Sales status</b>	On Sale
<b>Product classification</b>	Interior
<b>Model</b>	308911A

---

[WWW.FLUA.COM](http://WWW.FLUA.COM)


## Installation information

Area	Ceiling
Method	Suspended
Cut hole size	Φ 55mm
Embedded height	/

## Technical general

System power	7.1W	
Flux	446lm	
Beam angle	19°	
Material	Steel	
Appearance color	PAW	
Size	Φ 25*350mm	
Adjustable angle	Not available	
Ingress protection	IP20	
Input voltage	220-240VAC	50/60Hz
Electrical level	Class II	

## Photometric graph

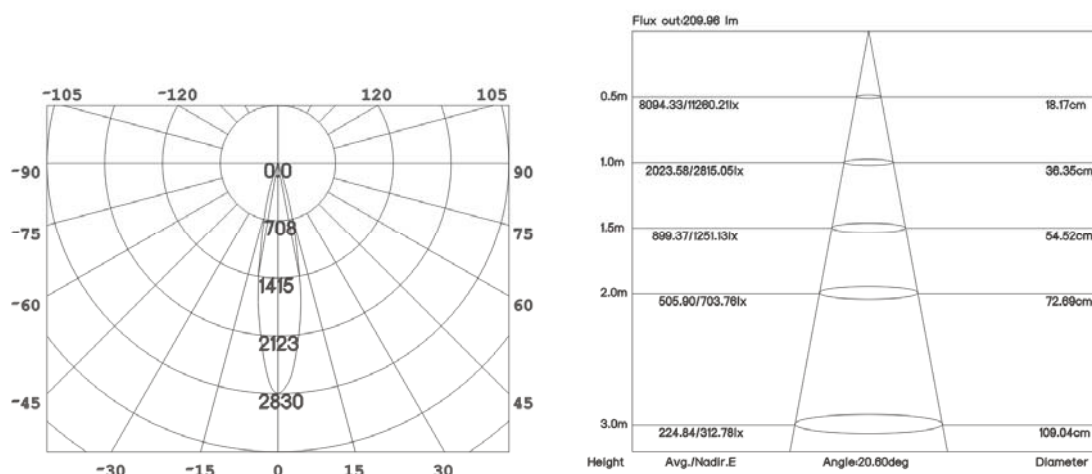

## Electrical parameters

Driver brand	FLUA
Driver type	FLUA006H0500NCMA
Electrical installation	External

---

## Light source parameters

Brand	CREE
Type	XHP35A
Power	6W
Light color	WW
Color temperature	3000K
CRI	90

---

## Other options

Beam angle	/
Color temperature	/
Color	/
Appearance color	PAB


---

# FLUA®

## 3D module



## Line drawing

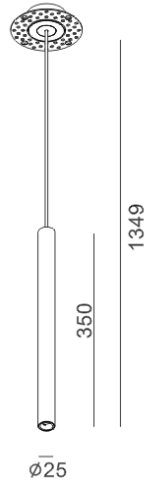

Unit: mm

## Instructions

