

FLUA®



FORMULIA 2.0 550 TRIMLESS



Slim body, three lengths optional, can support multiple combinations of installation to play your imagination, be applied to a variety of regional.

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	309011A

WWW.FLUA.COM


Installation information

Area	Ceiling
Method	Suspended
Cut hole size	Φ 55mm
Embedded height	/

Technical general

System power	7.1W	
Flux	446lm	
Beam angle	19°	
Material	Steel	
Appearance color	PAW	
Size	Φ 25*550mm	
Adjustable angle	Not available	
Ingress protection	IP20	
Input voltage	220-240VAC	50/60Hz
Electrical level	Class II	

Photometric graph

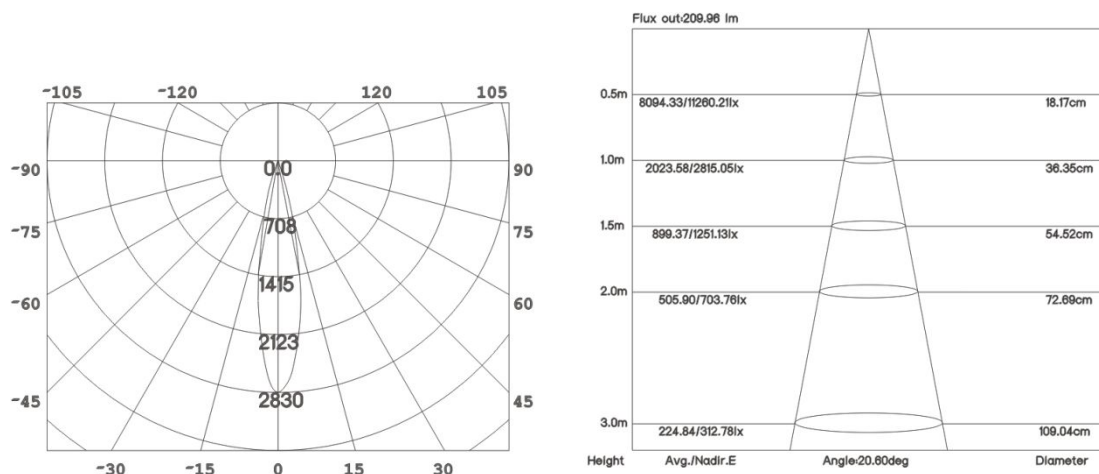

Electrical parameters

Driver brand	FLUA
Driver type	FLUA006H0500NCMA
Electrical installation	External

Light source parameters

Brand	CREE
Type	XHP35A
Power	6W
Light color	WW
Color temperature	3000K
CRI	90

Other options


Beam angle	/
Color temperature	2700K 4000K
Color	/
Appearance color	PAB

FLUA®

3D module



Line drawing

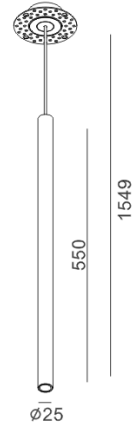

Unit: mm

Instructions

