

# FLUA®



**GLASSY L**



---

Inspired by the pillars standing in front of the Parthenon Temple in Greece, it is elegant and holy. The light-emitting base at the bottom emits lights of different color temperatures. Short press for CCT adjustment while Long press for brightness dimming.

---

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	444119TD

---

[WWW.FLUA.COM](http://WWW.FLUA.COM)

## Installation information

Area	Table
Method	Surface Mounted
Cut hole size	/
Embedded height	/

---

## Technical general

System power	3.8W
Flux	95lm
Beam angle	L
Material	Aluminum
Appearance color	PAW
Size	Φ100*300mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	5VDC
Electrical level	ClassIII

---

## Electrical parameters

Driver brand	DRIARTE
Driver type	DT4W150TCW
Electrical installation	Build in

---

## Light source parameters

Brand	JIRUI
Type	2538SW
Power	2.5W
Light color	CW-NW-WW
Color temperature	2700K-4000K-6500K
CRI	80

---

## Other options


Beam angle	/
Color temperature	/
Color	/
Appearance color	WLG PAB

# FLUA®

## 3D module



## Line drawing

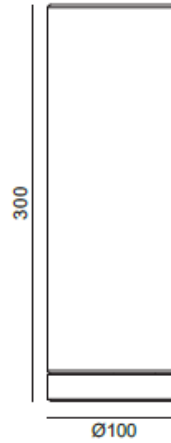

Unit: mm

## Instructions

