

FLUA®



REO 4



Created originally as very simple rectangular shaped luminaire, REO creates perfect lighting patterns on the wall, thanks to its special indirect optics. REO is available with 1, 2 or 4 LED. REO is the best choice for both private and public zones.

Designer	KH-W
Sales status	On Sale
Product classification	Interior
Model	431816A

WWW.FLUA.COM

Installation information

Area	Ceiling
Method	Surface mounted
Cut hole size	/
Embedded height	/

Technical general

System power	26W
Flux	896lm
Beam angle	P
Material	Aluminum,
Appearance color	PAB
Size	472*30*70mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	220-240VAC
Electrical level	Class I

Electrical parameters

Driver brand	KEGU
Driver type	4*KEDH006S0200NR01
Electrical installation	Build in

Light source parameters

Brand	LUMILEDS
Type	L150
Power	19.2W
Light color	WW
Color temperature	3000K
CRI	90


Other options

Beam angle	/
Color temperature	/
Color	/
Appearance color	/

FLUA®

3D module

Line drawing

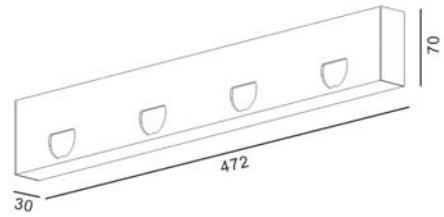

Unit: mm

Instructions

