

# FLUA®



**RIPPLE**

CCC CE RoHS

---

The product adopts RGBCWW five-in-one light source, which can be controlled through the mobile phone APP, and the required color or color temperature can be easily obtained in any scene and environment; the product is rich in size, and can be adapted to different shapes and sizes according to the application environment.

---

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	340819AP5

---

WWW.FLUA.COM

## Installation information

Area	Ceiling
Method	Suspended
Cut hole size	/
Embedded height	/

---

## Technical general

System power	21.5W
Flux	462lm
Beam angle	L°
Material	Aluminum
Appearance color	PAW
Size	1320*648*90mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	100-240VAC
Electrical level	Class I

---

---

## Electrical parameters

Driver brand	DRIARTE
Driver type	DW-RGBCW500T
Electrical installation	Build in

---

## Light source parameters

Brand	EVERCORE
Type	NCW2320B-100W-LSH
Power	16.7W
Light color	WW+RGB
Color temperature	2700-6000K RGB
CRI	90

---

## Other options


Beam angle	/
Color temperature	/
Color	/
Appearance color	PAB WLG

---

## 3D module



## Line drawing

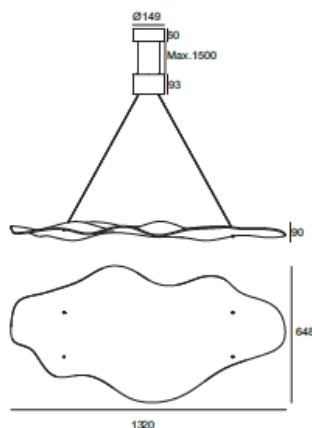

Unit: mm

# FLUA®

## Instructions

