


FLUA®



VIGRO P SS TRIMLESS

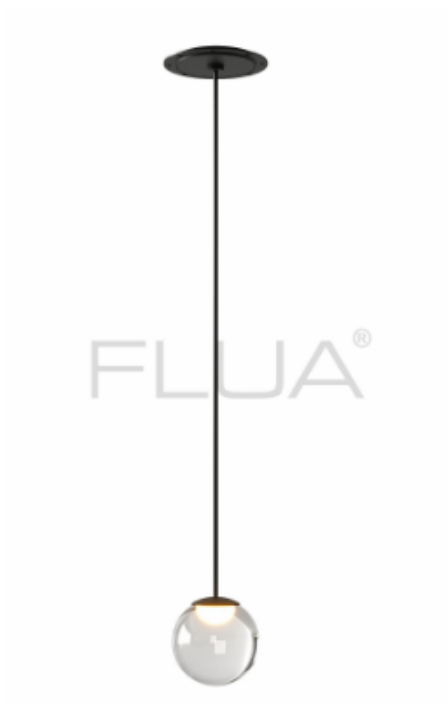

Crystal-ball shape luminaire - VIRGO with flood light source creates a fascinating spacial art. VIRGO can be used as pendant lamp and also suitable for various track systems, which enables use of surface and recessed mounted. Matte black, and champagne gold for options, also available for DALI and FLUA Lighting Home APP dimming.

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	340319AP2

WWW.FLUA.COM

Installation information

Area	Ceiling
Method	Suspended
Cut hole size	Φ75mm
Embedded height	/

Technical general

System power	4W
2029	155LM
Beam angle	L
Material	Aluminum
Appearance color	WBL
Size	Ø80*82mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	220-240VAC 50/60Hz
Electrical level	Class II

Electrical parameters

Driver brand	DRIARTE
Driver type	FLSW6W350TCW-D11
Electrical installation	External

Light source parameters

Brand	JIRUI
Type	2835SW
Power	2.1W
Light color	WW+CW
Color temperature	2700-6500K
CRI	80

Other options

Beam angle	/
Color temperature	/
Color	/
Appearance color	WWH WLG

3D module



Line drawing



Unit: mm

Instructions

1 Disassemble

Accessory Set

2 hole pattern

Ø75mm

10-30mm

3

4

5

⚠️ Monitor mounting attention for firmness of grouting job surface. Most embedded parts are made of iron. Pay attention to the wear condition of the surface coating when pointing. Such as coating damage or peeling, easy to cause rust and the overall appearance of the wall becomes poor.

Paint matching the ceiling

6

7

8

9

10