



5056



5057

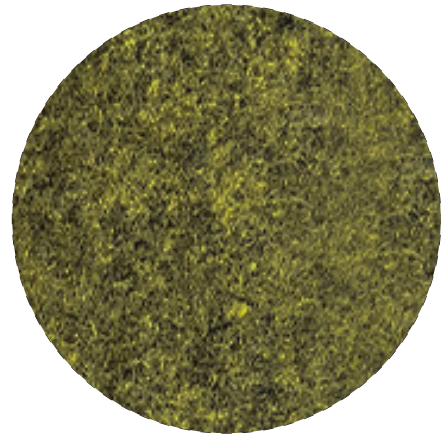

5059

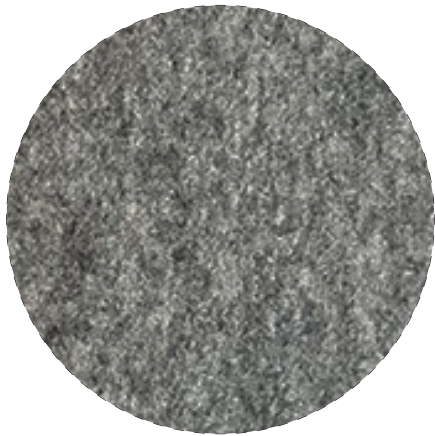


5055



5060



5058

Composition Composición		75% WO 25% PL
Weight Peso		700 gr/ml
Minimum usable width Ancho		145 cm
Abrasion (martindale) Resistencia a la abrasión		50.000  EN ISO 12947-1 EN ISO 12947-2
Pilling resistance Resistencia al pilling		3/4  EN ISO 12945-2
Flame resistance Resistencia al fuego	Cigarette test Cigarrillo	Pass Pasa BS 5852 source 0
	Match test Cerilla	Pass Pasa BS 5852 source 1
	California Technical Bulletin	Pass Pasa TB 117
Lightfastness Solidez a la luz		5 EN ISO 105-B02
Colour fastness to rubbing Solidez al frote	Dry Seco	4
	Wet Mojado	3-4 EN ISO 105-X12
Cleaning advise (loose covers) Condiciones de lavado		

**Important**

Key information about how different materials behave, and how they should be cared for can be found at <https://sancal.com/care>

Surface clean any liquids by dabbing with a damp cloth immediately after spillage to minimise soiling. Never rub.

Check the technical specification sheet to see if the cover can be removed from your product by visiting <https://sancal.com/technicals>

If you remove the cover, attach a protective cloth to the fastening strips to avoid damaging the fabric.

**Importante**

Información clave sobre el comportamiento de los diferentes materiales que empleamos y su conservación está disponible en: <https://sancal.com/care>

Limpie los líquidos con un trapo húmedo inmediatamente después del derrame para minimizar daños. No frote el textil.

Compruebe la hoja de características técnicas para saber si su producto es desenfundable <https://sancal.com/tecnicos>

Si decide desenfundar su producto, coloque una tela protectora sobre las cintas de sujección para evitar daños en la tapicería.

