

ArmstrongFlooring™

Accolade Plus™

Accolade Foothold®

Accolade Safe™

Wallflex®

Commercial Flooring
Homogeneous Vinyl Sheet

Armstrong Flooring™

Accolade™

Australian made Accolade™ is the only vinyl sheet flooring range that offers continuity of colour between wet and dry areas whilst having the ability to meet specific performance criteria for each area. The Accolade™ range includes Accolade Plus™, Accolade Foothold® and Accolade Safe™, all made to the same colour collection but with differing performance properties.

The Accolade™ homogeneous vinyl sheet flooring range is highly durable, easy to clean and low maintenance. Manufactured by Armstrong Flooring who have continued to innovate and invest in Australian manufacturing since the 1960's, it is no coincidence that in many Australian institutions like hospitals, schools and commercial buildings, the Accolade™ range of products can still be seen looking as new many decades later.

Certified through Global Greentag, a founding member of the Vinyl Council of Australia's PVC product Stewardship program, and the first Resilient supplier in Australia to achieve Best Environmental Practice Certification, Armstrong Flooring's Accolade Plus™ is Australia's very own tried and tested, versatile homogenous vinyl sheet flooring.


Being the only manufacturer of vinyl sheet flooring in Australia, Armstrong Flooring provide the greatest range of solutions and custom colour options in homogeneous vinyl sheet flooring with the shortest lead times.

The Essentials – Performance

Accolade's exclusive formulation including polyurethane reinforced surface and true through pattern construction throughout the thickness of the floor has been perfected over the years to provide optimum performance

Accolade Plus™ and Accolade Foothold® feature homogeneous construction throughout the flooring

Polyurethane reinforced surface for ultimate protection and best surface profile for cleaning

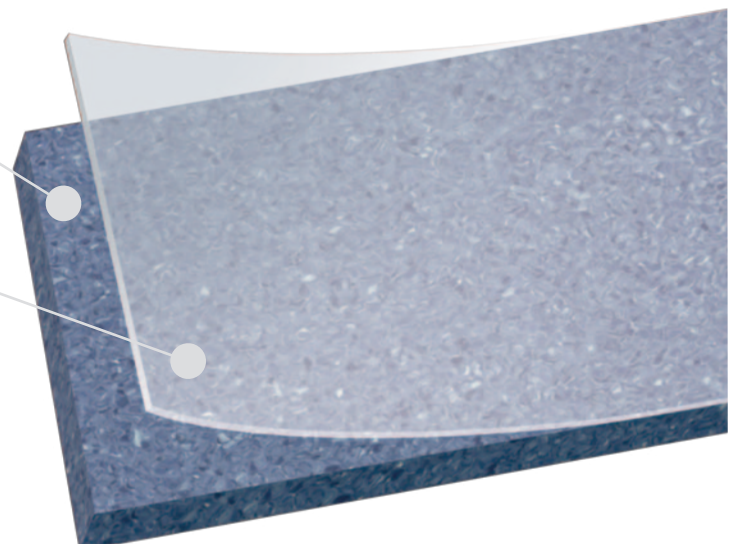

Low cost – easy maintenance with no polish required means lower maintenance and lifetime costs with reduced cleaning time and less disruption



Hygienic – Accolade's unique formulation and surface profile promotes easy cleaning and resistance to soiling. Additional infection control can be obtained with heat welded joints and integrated flash covers for high risk areas.



Exceptional durability – even wear, consistent appearance, superior wear and abrasion resistance. Withstands heavy boot and rolling load traffic










Chemical resistance – optimum surface profile for chemical resistance, easy cleaning and easy maintenance (further detail available on request)



Light Reflectivity – Research indicates reflectance can help capture daylight and reduce reliance on artificial lighting, resulting in reduced electricity usage and costs. Lighter colors with a matte finish have high reflectance values, but do not add to glare and are available within the Accolade™ range.



Waterproof – Accolade™ has been appraised by Branz to meet the NCC Deemed-to-Satisfy Performance Requirements for use as waterproofing membranes for internal wet areas when installed to the specified requirements (details available upon request)

	Accolade Plus™	Accolade Foothold®	Accolade Safe™
<p>Made in Australia 2mm x 1.83m x 16m</p> <p>Overall thickness ISO 24346 2.0mm</p> <p>Wear Layer thickness ISO 24340 2.0mm</p> <p>Roll dimensions ISO 24341 1.83m x 16m</p> <p>Binder Content ISO 10581 Type 1</p> <p>Type of floor covering/wall covering ISO 10581</p> <p>Fire Resistance (Flooring) ISO 9239-1</p> <ul style="list-style-type: none"> • Critical Radiant Flux ≥8kW/m² • Smoke Development Rate ≤750%. Minutes <p>Fire Resistance (Walling) AS 5637.1</p> <ul style="list-style-type: none"> • Cone Calorimeter Group 3 Average specific extinction area <250m²/kg <p>Classification (Use Area) ISO 10874</p> <p>Commercial: 34 </p> <p>Light Industrial: 43 </p>			
Key Features	<ul style="list-style-type: none"> • For highest durability and lowest maintenance. • Accolade Plus™ has homogeneous construction for excellent dent and gouge resistance and best for minimum maintenance. • The embossed surface texture and highly accented jaspe (multi-colour chip) visual helps hide dirt and wear patterns created in high traffic areas. 	<ul style="list-style-type: none"> • Recommended for wet barefoot areas, greatest slip resistance. • Polyurethane reinforced surface featuring PUR technology to aid maintenance and provide additional resistance against staining. • Provides added slip resistance and protects long term appearance. 	<ul style="list-style-type: none"> • Offers excellent safety without the compromise of silicon chips found in conventional slip resistant flooring. • Accolade Safe™ formulations reduce aquaplaning, while aiding slip resistance. • Anti Static in accordance with EN 1815.
Recommended Use Areas	<p>Recommended for general traffic areas of:</p> <ul style="list-style-type: none"> • Hospital • Light Industrial • Aged Care • Mercantile • Health Care • Hospitality • Education 	<p>Recommended for wet barefoot areas of:</p> <ul style="list-style-type: none"> • Hospital • Aged Care • Health Care • Education 	<p>Recommended for where greater non-slip is required of:</p> <ul style="list-style-type: none"> • Hospital • Light Industrial • Aged Care • Mercantile • Health Care • Hospitality
Polyurethane Reinforced	Yes 	Yes 	No
Slip Resistance AS 4586			
Wet pendulum	P3	P4	P4
Wet/barefoot		B	B
Oil-wet	R10	R11	R10


Visit www.armstrongflooring.au or contact Customer Service 1800 632 624 for technical data, installation, cleaning and maintenance instructions.



Accolade Plus™ and Accolade Foothold® (2mm x 1.83m x 16m)


Colours shown are our Stock Colour Range

Bespoke Colour also available




SPICE WHITE

LRV: 69




CAPPUCCINO ●

LRV: 44




IRONBARK ●

LRV: 23




MALLEE WHEAT ●

LRV: 43




WHITEHAVEN

LRV: 64



DARLING GREY ●

LRV: 36




HAY PLAINS

LRV: 25




BONDI SAND

LRV: 58




CEDUNA WHITE

LRV: 65




MURRAY CLAY ●

LRV: 30




SAND GREY ●

LRV: 26




CAPRICORN BEIGE ●

LRV: 46




CAMDEN GREY ●

LRV: 40



MINTARO SLATE

LRV: 23



BLACK OPAL ●

LRV: 16



CARNARVON RED ●

LRV: 30

Accolade Safe™ colour range depicted with ●


Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

Please check website for current stocked colours which may vary due to range updates from time to time (www.armstrongflooring.au).


Accolade Plus™ and Accolade Foothold® (2mm x 1.83m x 16m)

Colours shown are our Stock Colour Range


Bespoke Colour also available




GUNNAMATTA GREEN LRV: 33



SORRENTO BLUE LRV: 18




BLUE LAKE LRV: 16




SOVEREIGN GOLD LRV: 56



JERVIS GREEN ● LRV: 30



BELLS BLUE ● LRV: 24




TURQUOISE BAY LRV: 14




TANAMI LRV: 40



HUON PINE LRV: 38



MASLIN BLUE LRV: 35



RIVERINA PLUM LRV: 13



FLAMETREE LRV: 15



MOSSMAN LRV: 27



MOUNTAIN BLUE LRV: 25

Accolade Safe™ colour range depicted with ●


Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

Please check website for current stocked colours which may vary due to range updates from time to time (www.armstrongflooring.au).

Wallflex® (2mm x 1.5m x 20m)

Colours shown are our Stock Colour Range


Armstrong Flooring™



NEUTRAL WHITE
LRV: 77




COOL WHITE
LRV: 79




DOVE WHITE
LRV: 75




ALABASTER
LRV: 79




LINEN
LRV: 71




ICE WHITE
LRV: 80




BLUE GREY
LRV: 63



ALOE
LRV: 65



MUSHROOM
LRV: 65



PARADISE
LRV: 57

Technical Data		Wallflex®
Type of wall covering		<ul style="list-style-type: none"> • Homogeneous Sheet Vinyl • Polyurethane coating – reduces maintenance costs and protects long term appearance • Homogeneous construction – excellent dent and gouge resistance • 2.0mm thick for improved indent resistance and to align with floor vinyl • 1.5 metre width ideal dado height for ease of installation • Clean, simple design for an uncomplicated look or the addition of a frieze if desired.
Manufactured in		Australia
Overall Thickness	ISO 24346	2.0mm
Wear Layer Thickness	ISO 24340	2.0mm
Roll Dimensions	ISO 24341	1.5m x 20m
Polyurethane Reinforced		Yes PUR
Binder Content	ISO 10581	Type 2
Wear Resistance	EN 660-2	N/A
Fire Resistance (Walling)	AS 5637.1	
Cone Calorimeter		Group 1
Average specific extinction area		<250m ² /kg

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. Please check website for current stocked colours which may vary due to range updates from time to time (www.armstrongflooring.au).



Product Stewardship

When it comes to caring for our planet, Armstrong Flooring is Australia's only manufacturer of vinyl sheet flooring and is committed to the highest of standards, including:

- Phthalate free
- Ultra-low VOC
- Best Practice PVC
- GreenTag rated
- Audited manufacturing practices
 - ISO9001 Quality Management
 - ISO14001 Environmental Management



The Australian Made Advantage

Being made locally by the only commercial vinyl sheet manufacturer in Australia, the Wallflex® and the Accolade™ ranges have all the benefits that go with it – local technical and colour laboratories, product development facility and an ISO Certified production plant that offers greatest choice, “quick ship” as standard, bespoke colour options, flexibility and peace of mind knowing that the highest of quality standards and product stewardship are maintained.



For a customised flooring and walling solution, **Infinity Design** and **Infinity Bespoke** allows you to bring your projects to life. Using the standard Accolade collection as the base colour, **Infinity Design** provides the flexibility to add accent chip colours from a standard palette in fixed percentages to create a unique look. **Infinity Bespoke** enables you to develop a bespoke colourway using the Accolade and Wallflex formulations whether it's for branding requirements or you are creating an inspiring space that needs to work harmoniously within your design scheme.

*Minimum order quantities apply. Contact your Sales Representative, visit www.armstrongflooring.au or call 1800 632 624 for more information.

Installation

Just the right amount of flex in the Accolade™ range has made it a preferred option of Australian installers.

Installers love the ease of handling, flexibility and support that comes with the Accolade™ range, resulting in fewer problems or delays on site and happier clients.

Ultra low VOC, phthalate free and no harmful additives also makes the Accolade™ range a safer choice.



Braeside Mills Operations Pty Ltd trading as
Armstrong Flooring™
29 – 39 Mills Road Braeside 3195
Victoria Australia
1800 632 624
www.armstrongflooring.au

