

# Blend 8

## PRODUCT TECHNICAL INFORMATION SHEET

MANUFACTURING LOCATION	Belgium/UK
TYPE	Cut Brick Slip
COLOUR	Yellow Multi
APPEARANCE	Tumbled
WORK SIZE (MM)	215 x 22* x 65
QUANTITY PER M <sup>2</sup>	60
INDIVIDUAL DRY SLIP WEIGHT (KG)	TBC
<small>*other thicknesses available on request</small>	

## TECHNICAL PROPERTIES TO BS EN 771-1


SIZE TOLERANCE (mean/range)	Tm/Rm
GROSS DRY DENSITY (kg/m <sup>3</sup> /tolerance)	1380 (D1)
COMPRESSIVE STRENGTH (N/mm <sup>2</sup> )	NPD
THERMAL CONDUCTIVITY (W/(m·K)) <small>λ10, dry, unit value (EN 1745 tabulated: S1)</small>	P=90% 0.51
DURABILITY DESIGNATION	F2
WATER ABSORPTION (%)	≤22
INITIAL RATE OF WATER ABSORPTION <small>(kg/(m<sup>2</sup>·min))</small>	Min 1.2 Max 4.2
ACTIVE SOLUBLE SALTS	S2
REACTION TO FIRE	Class A1

ISSUE DATE:01/02/2022

Technical data correct at time of issue. Individual dry slip weights can vary and are for guidance only. NPD = No Performance Determined. Due to the limitations of screen and print colour representation of product images it is advised that brick samples are viewed prior to ordering.



AVAILABLE IN FULL, CORNER & HALF (mm)

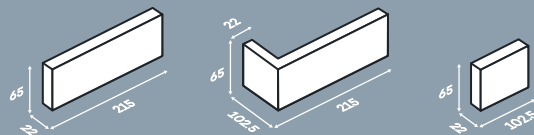

CONTACT US

03338 804807

support@thebricktilecompany.com

www.bricktilecompany.com