



C332

#### Features:

4 tips Canadian glove with reinforced knuckle protection on drill fabric and rubberized cuff, white tape binding at the end of the cuff,  
Provides good mechanical resistant and comfort  
Total wt/ pair (g)- 158 gm  
Gross wt/ carton- 19.4 kg  
Chromium VI free leather according to EN 420:2003 + A1:2009

## C332

#### Material used

Palm -Yellow grain leather with 1.0-1.2 mm thickness  
Back - Premium quality red colored cotton drill back  
Cuff - Rubberized safety cuff  
Binding - Synthetic red binding

#### Available Size


7, 8, 9, 10, 11

#### Color

Back: Red drill back with yellow knuckle protector  
Palm: yellow

#### Specifications:

Liner: Cotton cloth lining  
Palm length : 260 mm (size 10)  
Weight (DZP): 1900 (±10) gm (size 10)

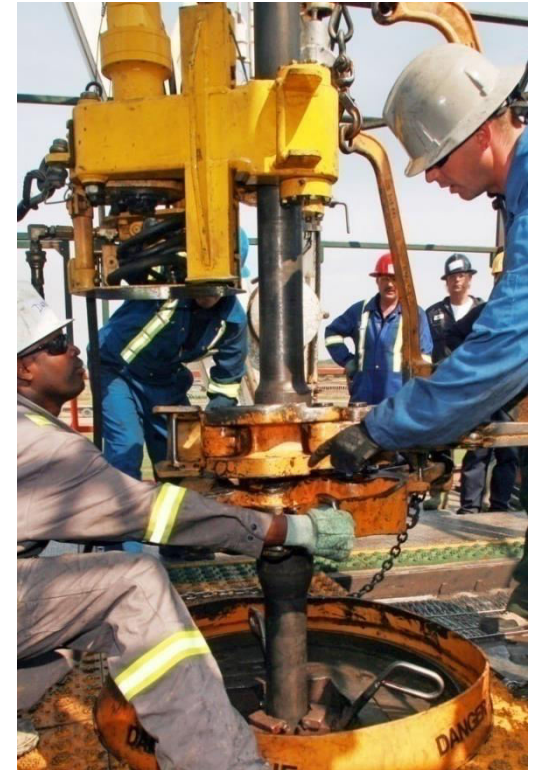

## CANADIAN GLOVES

*Yellow cow grain leather  
Canadian glove with leather reinforced knuckle protection on drill fabric back, rubberized cuff*



#### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E : [safety@mallcom.in](mailto:safety@mallcom.in), w : [www.mallcom.in](http://www.mallcom.in)



**Safe hands!!**

### Limit to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

### Instructions for storage:

Store the gloves in cool dry place and out of reach of sunlight in their original carton and packing.

Using life depends on character of activity and usage frequency.

---

*Mallcom Canadian gloves provides superior comfort and dexterity with unparalleled mechanical resistant properties*

---

### Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines.

### Instructions for cleaning / maintenance:

No specific cleaning or maintenance for this type of glove.

### Packaging Instruction:

1 dozen pairs in a polybag  
10 poly bags in a carton  
120 pairs in a carton



Performance according to EN 388:2003 :

- 2 Resistance to abrasion (from 0 to 4)
- 1. Resistance to cut (from 0 to 5)
- 4. Resistance to tear (from 0 to 4)
- 2. Resistance to puncture (from 0 to 4)

### Applications:

#### Automotive

Assembly & inspection of components  
Chassis assembly, body trimming

#### Machinery and Equipment

Assembly & disassembly of equipment  
Fabricating metal parts

#### Metal fabrication

Mounting and dismantling  
Production line support & maintenance



### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E: [safety@mallcom.in](mailto:safety@mallcom.in), w: [www.mallcom.in](http://www.mallcom.in)