



DIAMOND III

Features:

Lightweight and durable helmet meeting a wide range of standard performance requirements. Available with a choice of ratchet or Zip adjustment for adaptability. Compatible with a wide range of safety products and metal-working accessories (such as Eye wear, Ear muff etc..) to provide the complete solution for your application. Conformed for use at temperatures ranging from -10°C to +50°C. Available in a range of 6 colors for identification purposes. Sturdy UV resistant HDPE Safety helmet without ventilation having absorbent sweat band, polypropylene harness and ratchet or zip adjustment property

DIAMOND III

Material used

Shell: Non ventilated UV resistant HDPE
Harness Textile : Polypropylene
Chin strap cover (if required): LDPE
Chin strap: Polypropylene

Sizes:


Adjustable (53-63 cm)

Available Colors:

Green, Orange, Red, Blue, Yellow, White

Specifications:

Weight: 350-365 g (without and with chin strap)
No. of attachment points: 8

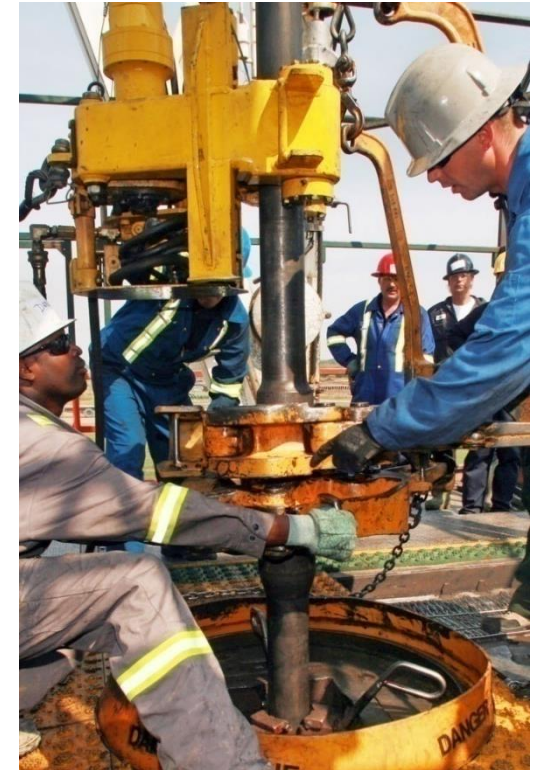

SAFETY HELMET

*Non Ventilated ratchet
adjusted Industrial safety
helmet*



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in



Head Shield!!

Limits to use

The helmet life is affected by several factors, such as cold, heat, chemical products, sun light or misuse. A daily check should be performed in order to identify any sign of rendering (cracks, flaws) the helmet, its harness and accessories fragile. Any helmet having been subject to a strong shock or having wear signs should be replaced. Under normal usage conditions, this protective helmet should provide proper protection for 2 up to 3 years after the first usage, or 5 years according to the manufacturing date (written inside). If a sensitive person has an allergic reaction, remove the helmet and ask for medical advice.

Instructions for storage:

It should be stored in a dry cool place away from light, frost and in a location granting that no chemical product or sharp object bends it by falling above.

Mallcom Helmet provides superior protection to the skull and excellent durability

Instructions for cleaning:

This protective helmet may be cleaned and disinfected by means of a cloth impregnated in a low concentration cleaning solution. One shall not use any abrasive or corrosive chemical product. If this helmet cannot be cleaned by using this method, it should be replaced.

Performances:

This helmet complies with the European directive 89/686, notably regarding ergonomics, innocuousness, comfort and ventilation, and with EN397:2012 (-10°C / +50°C) standard. EC type examination and testing performed by in house test facility.

Applications:

Steel manufacturing industries
Aluminum Smelting
Foundries & Casting
Metal recycling
Refractory production
Cement
manufacturing industries
Construction sites



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in