



F33NBG

## F33NBG

### Material used & Specifications

Base material- Liner blended with UHMWPE, Polyamide, Polyester and Spandex fibre  
Coating- NBR compound coated  
Binding -Colour coded overlock binding polypropylene yarn (07-Red, 08-Yellow, 09-Brown, 10-Black)

### Sizes

7, 8, 9, and 10

### Color


Back: grey  
Palm: black

### Features:

13 Gauge seamless knitting construction  
Open back configuration for better ventilation,  
Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue,  
Colour coded overlock binding helps to identify different sizes,  
Nitrile dipped palm provides excellent puncture and abrasion resistance properties, also provide assistance to handling chemicals and oils.

### Specifications

Gauge: 13  
Weight: 900 ( $\pm 10$ g)  
Finishing: Sandy Finish

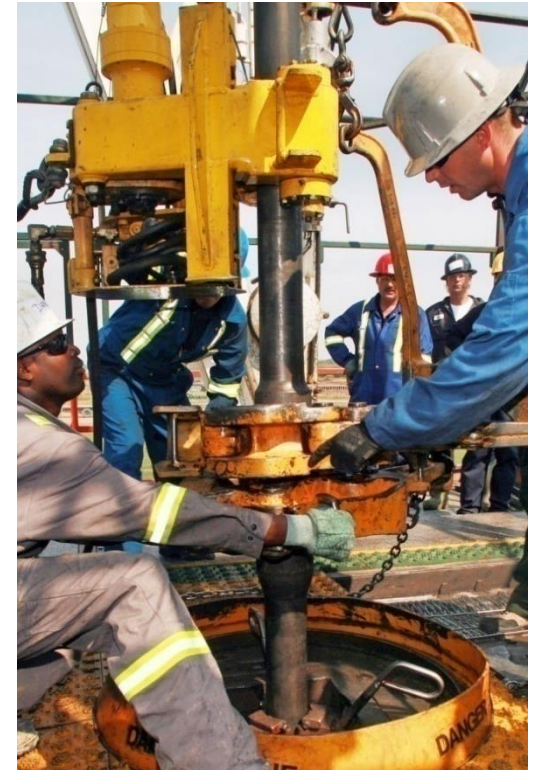

# NITRILE GLOVES

*Cut Resistant Level 3 Seamless Nitrile Coated Gloves Blended with UHMWPE Fiber, Sandy Finish.*



### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E : [safety@mallcom.in](mailto:safety@mallcom.in), w : [www.mallcom.in](http://www.mallcom.in)



## Safe hands!!

### Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

### Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

---

*Our engineered high cut resistant UHWMPE blended Tec® yarn with nitrile coated surface provide, dexterity and mechanical resistant*

---

### Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

### Instructions for cleaning:

No specific cleaning or maintenance for this type of glove.

### Packaging Instruction:

1 dozen pairs in a polybag  
10 poly bags in a carton  
120 pairs in a carton  
(300 pairs/carton option also available)



Performance according to EN 388:2003 :

- 4. Resistance to abrasion (from 0 to 4)
- 3. Resistance to cut (from 0 to 5)
- 4. Resistance to tear (from 0 to 4)
- 3. Resistance to puncture (from 0 to 4)



### Applications:

Construction Works.  
Lumber and mill works  
Glass sheet handling.  
Metal/aluminium sheet handling  
Installing fence / barb wire  
Machine parts assembling disassembling



### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E: [safety@mallcom.in](mailto:safety@mallcom.in), w: [www.mallcom.in](http://www.mallcom.in)