



HL010

Features:

Seamless knitting construction eliminates uncomfortable seams that can rub, tear or chafe
Open back configuration provides superior ventilation.

Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue.,

Colour coded overlock binding helps to identify different sizes (07 – Red, 08 – Yellow, 09 – Brown , 10 – Black),
Level 5 Blade cut resistance gloves makes easier to work with sharp edged objects e.g. Machine blade, glass, installing barb wire Fence etc

HL010

Materials Used

Palm- Natural split leather reinforced
Liner- UHMWPE, Glass, Polyamide, Polyester & Spandex Fiber
Overlock binding- Colour coded polypropylene yarn
Palm length- 260 mm
Thickness- 1.3 – 1.4 mm

Sizes


7, 8, 9 & 10

Color

grey

Specifications:

Palm length: 260 mm (size 10)
Weight (DZP): 910 (±10) g (size 10)
Gauge: 10

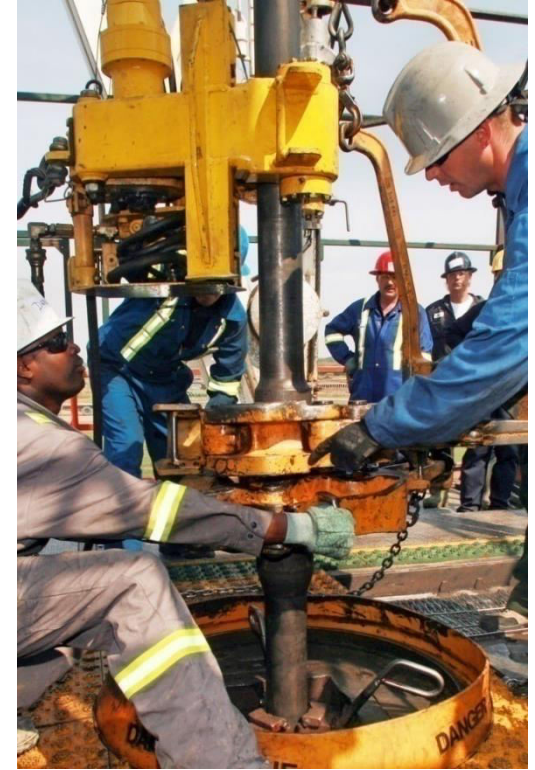

PALM REINFORCED KNITTED GLOVE

Split leather patch palm reinforced this glove series provides durable hand protection and supreme cut resistance, with outstanding dexterity. 10 gauge these gloves are made with UHMWPE, Glass based blended yarn and reinforced palm provide excellent mechanical resistance



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in



Safe hands!!

Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

Our engineered high cut resistant Tuf Tech® yarn provides superior comfort mechanical resistant properties leather patch reinforcement

Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

Instructions for cleaning

No specific cleaning or maintenance for this type of glove.

Packaging Instruction:

1 dozen pairs in a polybag
10 poly bags in a carton
120 pairs in a carton



Performance according to EN 388:2003 :

- 4. Resistance to abrasion (from 0 to 4)
- 5. Resistance to cut (from 0 to 5)
- 4. Resistance to tear (from 0 to 4)
- 2. Resistance to puncture (from 0 to 4)



Applications:

- Construction Works
- Lumber and mill works
- Glass sheet handling.
- Metal/aluminium sheet handling
- Installing fence / barb wire
- Machine parts assembling
- disassembling



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w: www.mallcom.in