



#### Features:

Lightweight and durable helmet meeting a wide range of standard performance requirements.

Available with a choice of ratchet or Zip adjustment for adaptability.

Compatible with a wide range of safety products and metal-working accessories (such as Eye wear, Ear muff etc..) to provide the complete solution for your application.

Conformed for use at temperatures ranging from -10°C to +50°C.

Sturdy UV resistant HDPE Safety helmets

## JASPER I

#### Material used

HDPE shell material

Plastic harness lining with 2 bands with 4 attachment points

Zip adjustment

head measurement 52 to 60 cm

Chin strap adjustment option available

Adjustable 52 - 60 cm

#### Sizes:


#### Available Colors:

White, Red, Yellow

#### Specifications:

Weight: 285 g (with chin strap)

No. of attachment points: 4

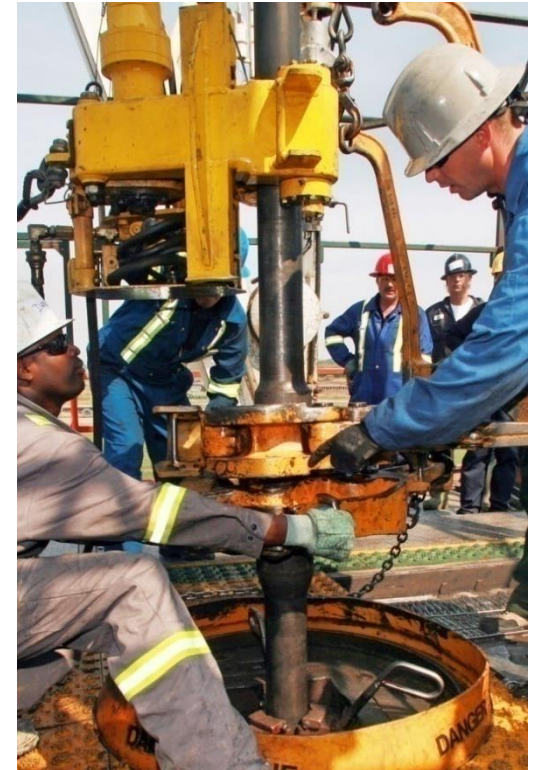

## SAFETY HELMET

*Non Ventilated Zip adjusted  
Industrial safety helmet*



#### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City

Kolkata 700091, India

T: +E: [safety@mallcom.in](mailto:safety@mallcom.in), w: [www.mallcom.in](http://www.mallcom.in)



## Head Shield!!

### Limits to use

The helmet life is affected by several factors, such as cold, heat, chemical products, sun light or misuse. A daily check should be performed in order to identify any sign of rendering (cracks, flaws) the helmet, its harness and accessories fragile. Any helmet having been subject to a strong shock or having wear signs should be replaced. Under normal usage conditions, this protective helmet should provide proper protection for 2 up to 3 years after the first usage, or 5 years according to the manufacturing date (written inside). If a sensitive person has an allergic reaction, remove the helmet and ask for medical advice.

### Instructions for storage:

It should be stored in a dry cool place away from light, frost and in a location granting that no chemical product or sharp object bends it by falling above.

---

*Mallcom Helmet provides superior protection to the skull and excellent durability*

---

### Instructions for cleaning:

This protective helmet may be cleaned and disinfected by means of a cloth impregnated in a low concentration cleaning solution. One shall not use any abrasive or corrosive chemical product. If this helmet cannot be cleaned by using this method, it should be replaced.

### Performances:

This helmet complies with the PPE REGULATION 2016/425 , notably regarding ergonomics, innocuousness, comfort and ventilation, and with EN397:2012 (-10°C / +50°C) standard.

&

According to standard IS 2925:1984



### Applications:

Steel manufacturing industries  
Aluminum Smelting  
Foundries & Casting  
Metal recycling  
Refractory production  
Cement manufacturing industries  
Construction sites



### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City

Kolkata 700091, India

T: +E: [safety@mallcom.in](mailto:safety@mallcom.in), w: [www.mallcom.in](http://www.mallcom.in)