



K63NAA

#### Features:

The optimal combination of cut resistance, comfort and dexterity,  
Open back configuration for better ventilation,  
Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue,  
Colour coded overlock binding helps to identify different sizes,  
Nitrile dipped palm provides excellent puncture and abrasion resistance properties, also provide assistance to handling chemicals and oils.

## K63NAA

#### Material used

Coating - Dipped on blue coloured Nitrile compound  
Liner - Kevlar®  
Gauge -13  
Cuff - Knitted  
Binding - colour binding according to size  
07 - Red, 08 - Yellow, 09 - Brown

#### Sizes


7, 8, 9, and 10

#### Color

Back: yellow  
Palm: blue

#### Specifications

Gauge: 13  
Weight: 900 (±10g)  
Finishing: Smooth Finish

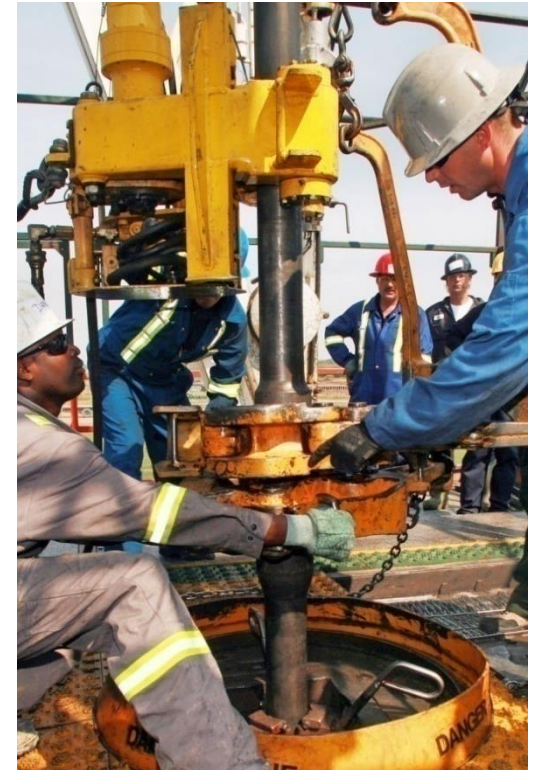

# NITRILE GLOVES

*DuPont Kevlar® knitted  
Seamless Nitrile Coated  
Gloves. Smooth Finish.*



#### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E : [safety@mallcom.in](mailto:safety@mallcom.in), w : [www.mallcom.in](http://www.mallcom.in)



## Safe hands!!

### Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

### Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

---

*Dupont Kevlar® with nitrile coating ensure durability and performance*

---

### Warning


Gloves not to be worn when there is a risk of entanglement by moving parts of machines

### Instructions for cleaning:

No specific cleaning or maintenance for this type of glove.

### Packaging Instruction:

1 dozen pairs in a polybag  
10 poly bags in a carton  
120 pairs in a carton  
(240 pairs/carton option also available)



Performance according to EN 388:2003 :

3. Resistance to abrasion (from 0 to 4)
2. Resistance to cut (from 0 to 5)
3. Resistance to tear (from 0 to 4)
1. Resistance to puncture (from 0 to 4)



### Applications:

#### Automotive Aftermarket:

Chassis assembly, body trimming  
Foundry operations

#### Machinery and Equipment:

Handling materials with sharp or rough edges  
Handling metal sheets & panels  
Handling parts in high heat areas  
Handling parts with sharp, rough edges



### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E: [safety@mallcom.in](mailto:safety@mallcom.in), w: [www.mallcom.in](http://www.mallcom.in)