



KL010

Features:

Seamless knitting construction eliminates uncomfortable seams that can rub, tear or chafe,
Open back configuration provides superior ventilation,
Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue,
Available with 7 or 10 gauge knitting option,
Colour coded overlock binding option helps to identify different sizes (07 - Red, 08 - Yellow, 09 - Brown - 10 - Black),
With Excellent mechanical threat & Heat resistance glove.

KL010

Materials Used

Liner - DuPont Kevlar®

Overlock binding - Polypropylene yarn

Reinforcement material - Natural split leather

Thickness - 1.2 - 1.3 mm

Sizes

7, 8, 9 & 10

Colour


Back: natural yellow

Palm: Natural split leather

Specifications:

Palm length: 260 mm (size 10)

Weight (DZP): 960 (±10) g (size 10)

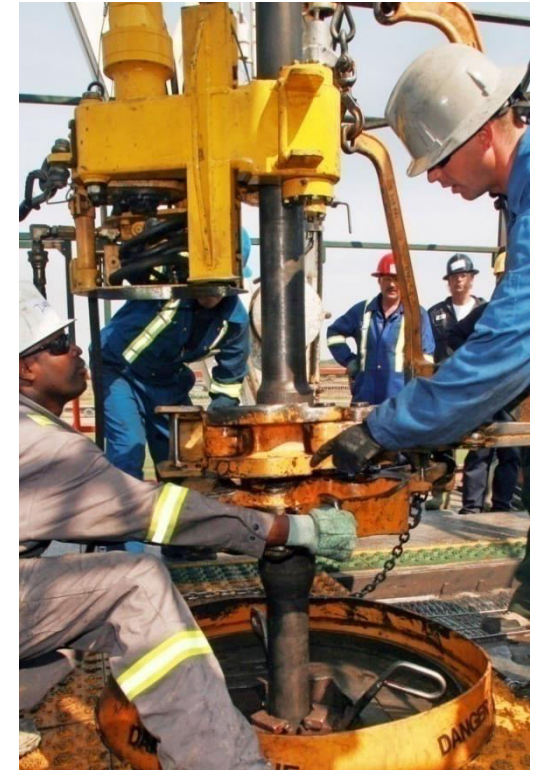

PALM REINFORCED KNITTED GLOVE

This glove series provides durable hand protection and supreme abrasion & cut resistance, with outstanding dexterity. 10 gauge gloves are made with DuPont Kevlar® yarn and reinforced palm provide excellent mechanical resistance



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City

Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in



Safe hands!!

Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

Our excellent knitting technology imparts superior comfort and dexterity with unparalleled mechanical and thermal risk resistant properties

Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

Instructions for cleaning

No specific cleaning or maintenance for this type of glove.

Packaging Instruction:

1 dozen pairs in a polybag
10 poly bags in a carton
120 pairs in a carton



Performance according to EN 388:2003 :

- 4. Resistance to abrasion (from 0 to 4)
- 3. Resistance to cut (from 0 to 5)
- 4. Resistance to tear (from 0 to 4)
- 2. Resistance to puncture (from 0 to 4)
- X. TDM Blade cut resistance level (from A to F)
- X - Means not tested

Applications:

Construction Works.
Lumber and mill works
Metal/ aluminium sheet handling
Machine parts assembling
disassembling
Motor industry
Heat resistant applications



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w: www.mallcom.in