



M35NBV

#### Features:

Seamless knitting construction, Open back configuration for better ventilation, Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue. Colour coded overlock binding helps to identify different sizes, Nitrile dipped palm provides excellent puncture and abrasion resistance properties, also provide assistance to handling chemicals and oils.

## M35NBV

#### Material used

Palm: Nitrile coated palm over nylon spandex blended liner  
Coating – Coated with NBR &PU based compound.  
Foamy Finish  
Liner – Nylon & Spandex blended  
Gauge - 15  
Cuff – Knitted  
Binding – Fused binding, colour according to sizes:  
07 – Red, 08 – Yellow, 09 - Brown, 10 - Black

#### Sizes


7, 8, 9, and 10

#### Color

Back: grey  
Palm: black

#### Specifications

Gauge: 15  
Weight: 540(±10g)  
Finishing: Foamy Finish

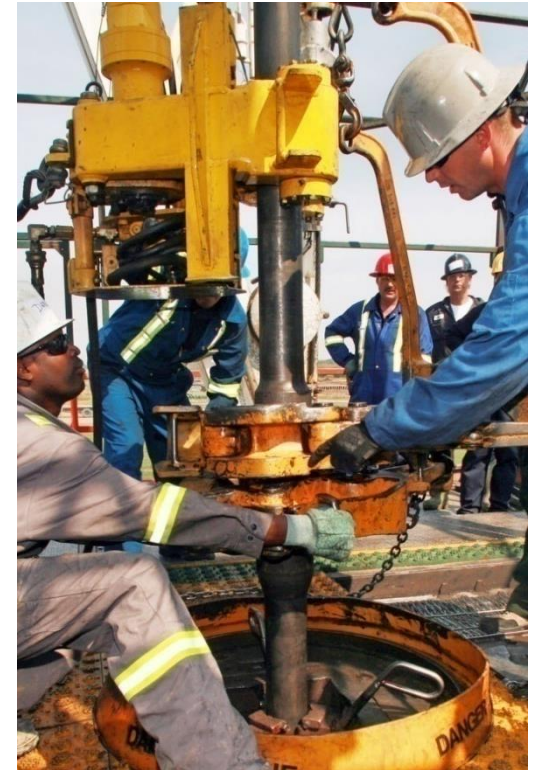

## NITRILE GLOVES

*15 gauge, black coloured Nylon-Spandex blended foamy finished Nitrile gloves provide durable hand protection and supreme abrasion resistance with an outstanding dexterity*



#### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E : [safety@mallcom.in](mailto:safety@mallcom.in), w : [www.mallcom.in](http://www.mallcom.in)



## Safe hands!!

### Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

### Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

---

*Patented Foamyflex ®  
finishing provides superior  
comfort and durability and  
performance*

---

### Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

### Instructions for cleaning:

No specific cleaning or maintenance for this type of glove.

### Packaging Instruction:

1 dozen pairs in a polybag  
10 poly bags in a carton  
120 pairs in a carton  
(240 pairs/carton option also available)



Performance according to EN 388:2003 :

- 4 Resistance to abrasion (from 0 to 4)
- 1 Resistance to cut (from 0 to 5)
- 3 Resistance to tear (from 0 to 4)
- 1 Resistance to puncture (from 0 to 4)



### Applications:

Construction Works.  
Lumber and mill works  
Metal/aluminium sheet handling  
Machine parts assembling disassembling  
Gardening  
Agricultural applications  
Motor industry  
Parts assembly  
Painting job



### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E: [safety@mallcom.in](mailto:safety@mallcom.in), w: [www.mallcom.in](http://www.mallcom.in)