



NEB213BY

NEB213BY

Material used

Outer material: Bi-Colour blue neoprene blend over yellow natural rubber
Lining: Flock lined with cotton dust

Sizes

7, 8, 9, 10, 11

Color


Blue & Yellow

Features:

Flock lined Bi-Colour blue neoprene blend over yellow natural rubber unsupported gloves
Raised diamond grip pattern
Specially designed contoured shape ensures better dexterity
Good protection from hydraulic fluids, gasoline alcohols, organic acids and alkalis, at palm area when compared with ordinary gloves
Patterned palm and fingers give excellent grip in both wet and dry condition.
Cotton flock-lining offers added comfort and better absorption of perspiration

Specifications:

Gauntlet style
Raised diamond grip pattern
Weight – 60g/pair
Thickness – 15 mil

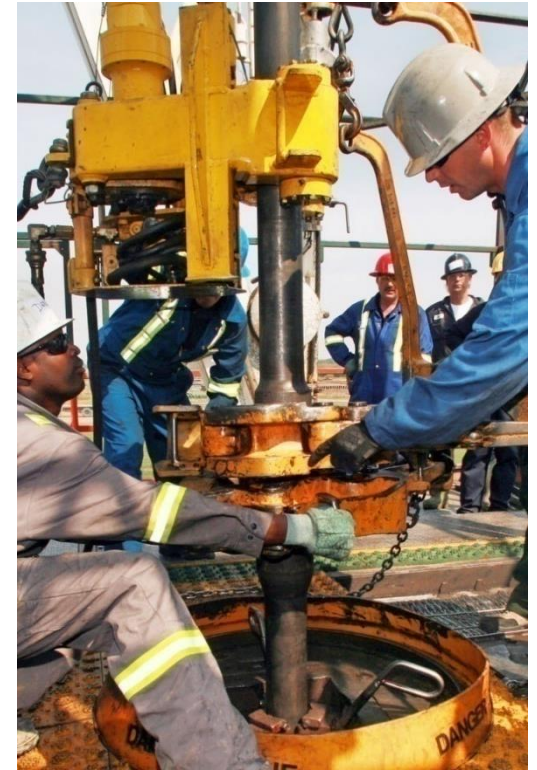

UNSUPPORTED GAUNTLET GLOVE

Bi-Colour blue neoprene blend over yellow natural rubber cotton flock lined gauntlets with a patterned grip



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in



Safe hands!!

Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

Unsupported flock lined Neoprene glove: can be use against Mineral acids, alkali, common Solvents, oils, greases, weak acid and bases, aliphatic chemicals, Xylene, Perchloroethylene, Trichloroethane;

Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

Instructions for cleaning:

No specific cleaning or maintenance for this type of glove.



Performance according to EN 388:2003

- 2. Resistance to abrasion (from 0 to 4)
- 1. Resistance to cut (from 0 to 5)
- 0. Resistance to tear (from 0 to 4)
- 1. Resistance to puncture (from 0 to 4)

EN 374- 3



A: Methanol
J: n- Heptan
K: Sodium Hydroxide 40%
L: Sulfuric acid 96%

Level 2

Applications:

Excellent for general use
Reasonable cost, excellent physical properties,
good dexterity
Excellent abrasion resistant.
Remain functional with variable types of corrosive agents

Packaging Instruction:

144 Pairs in a carton



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w: www.mallcom.in