



PS5NHT

NS5NHT

Material used

Palm- sandy finish with 1.5 mm thickness
Liner- Nylon
Coating Compound- NBR
Binding - Polypropylene yarn

Sizes

7, 8, 9, and 10

Colour

Palm- black
Back- blue,
Black

Specifications

Gauge: 15
Weight: 660 (± 10 g)
Finishing: Sandy Finish

Features:


The lightest weight abrasion resistant + oil-repellent glove providing superior worker comfort & safety.

Oil repellent glove for maintaining dry hand in oily environment.

Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue.

Colour coded overlock binding helps to identify different sizes (07- Red, 08- Yellow, 09- Brown, 10- Black)

Nitrile dipped palm provides excellent puncture and abrasion resistance properties, also provide assistance to handling chemicals and oils.

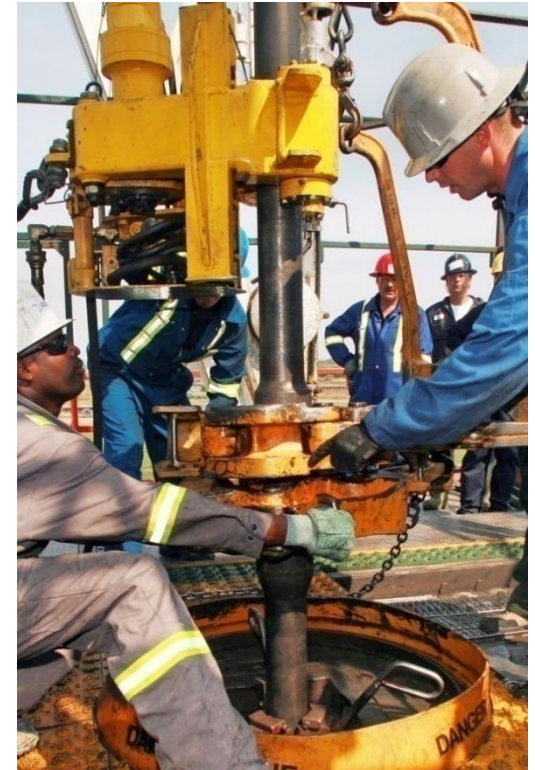

NITRILE GLOVES

Blue Nylon 15 gauge seamless liner coated with 2 different layers of Nitrile compound, Black sandy coating over full blue smooth finish.



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in



Safe hands!!

Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

Polyester seamless with dual coated Nitrile ensures protection against chemical as well as mechanical threats

Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

Instructions for cleaning:

Use cold water only: 68°F/30°C, Use a mild detergent, Tumble dry low or no heat, bleach is not recommended

Packaging Instruction:

1 dozen pairs in a polybag
10 poly bags in a carton
120 pairs in a carton
(240 pairs/carton option also available)



Performance according to EN 388:2016 + A1:2018

4: Resistance to abrasion (from 0 to 4)
1: Resistance to cut (from 0 to 5)
3: Resistance to tear (from 0 to 4)
1: Resistance to puncture (from 0 to 4)
X: TDM blade cut resistant level (from A to F)



Applications:

Construction Works.
Lumber and mill works
Metal/aluminium sheet handling
Machine parts assembling disassembling
Motor industry
Oil Industry
Painting jobs



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w: www.mallcom.in