



P35N HK

P35N HK

Material used

Palm:- 1.7 mm thick sandy finish
Coating Compound:- NBR
Liner:- Polyester
Binding :- Polypropylene yarn

Sizes

7, 8, 9, 10, 11

Color

Liner Color:- Grey
Coating Color: Back-& blue-

Specifications

Gauge: 15
Weight: 480-680 g/dzp
Finishing: Sandy Finish

Features:


The lightest weight abrasion resistant + oil-repellent glove providing superior worker comfort & safety.

Oil repellent glove for maintaining dry hand in oily environment.

Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue.

Colour coded overlock binding helps to identify different sizes (07- Red, 08- Yellow, 09- Brown, 10- Black)

Nitrile dipped palm provides excellent puncture and abrasion resistance properties, also provide assistance to handling chemicals and oils.

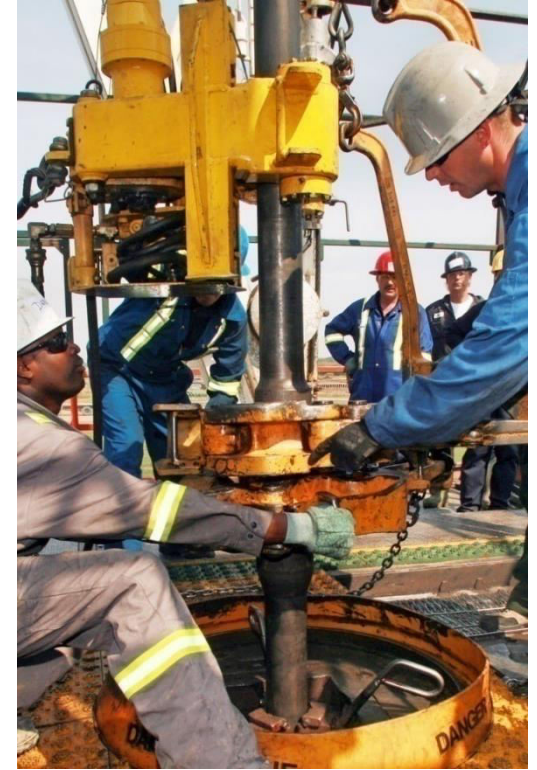

NITRILE GLOVES

Grey Polyester 15 gauge seamless liner coated with 2 different layers of Nitrile compound, Black sandy coating over 3/4th blue Sandy finish.



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in



Safe hands!!

Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

Polyester seamless with dual coated Nitrile ensures protection against chemical as well as mechanical threats

Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

Instructions for cleaning:

No specific cleaning or maintenance for this type of glove.

Packaging Instruction:

1 dozen pairs in a polybag
10 poly bags in a carton
120 pairs in a carton
(240 pairs/carton option also available)



Performance according to EN 388:2003 :

- 4. Resistance to abrasion (from 0 to 4)
- 1. Resistance to cut (from 0 to 5)
- 2. Resistance to tear (from 0 to 4)
- 1. Resistance to puncture (from 0 to 4)



Applications:

Construction Works.
Lumber and mill works
Metal/aluminium sheet handling
Machine parts assembling disassembling
Gardening
Agricultural applications
Motor industry
Oil industry
Painting jobs



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w: www.mallcom.in