



PL010

Features:

Seamless knitting construction eliminates uncomfortable seams that can rub, tear or chafe

Open back configuration provides superior ventilation.

Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue.,

Colour coded overlock binding helps to identify different sizes (07 – Red, 08 – Yellow, 09 – Brown , 10 – Black), Level 5 Blade cut resistance gloves makes easier to work with sharp edged objects e.g. Machine blade, glass, installing barb wire Fence etc

PL010

Materials Used

Palm:- Natural split leather reinforced

Liner:- Para-aramid & Polyester

Spandex Fiber

Overlock binding:- Colour coded polypropylene yarn

Rubber band: yes

Thickness:- 1.3=1.4 mm

Sizes

7, 8, 9, 10

Color

Back: grey


Palm: white

Specifications:

Gauge: 10

Wrist: Knitted and elastane materials

Weight (DZP): 500-900 g/dzp

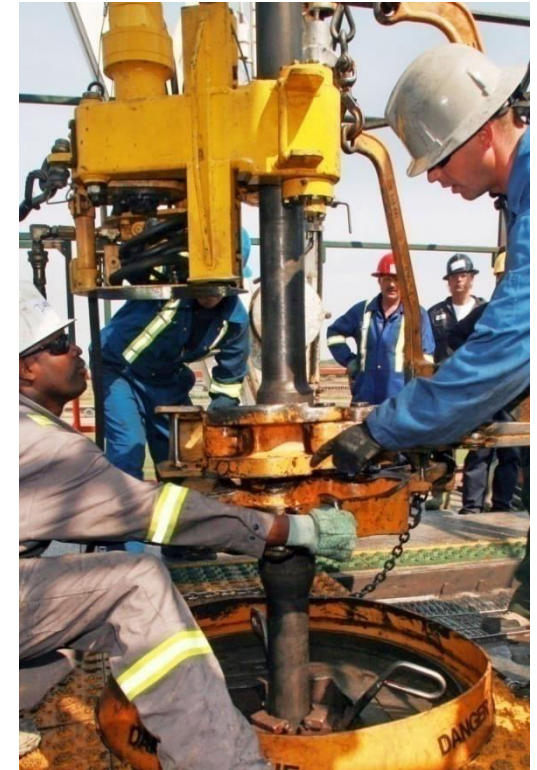

PALM REINFORCED KNITTED GLOVE

Split leather patch palm reinforced glove with 260 mm palm length are made with Para-aramid, Glass based blended yarn and reinforced palm provide excellent mechanical resistance, available in 10 gauge.



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City

Kolkata 700091, India

T: +E : safety@mallcom.in, w : www.mallcom.in



Safe hands!!

Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

Our engineered high cut resistant Tech® yarn provides superior comfort mechanical resistant properties leather patch reinforcement

Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

Instructions for cleaning

No specific cleaning or maintenance for this type of glove.

Packaging Instruction:

1 dozen pairs in a polybag
10 poly bags in a carton
120 pairs in a carton



Performance according to EN 388:2003 :

- 4. Resistance to abrasion (from 0 to 4)
- 3. Resistance to cut (from 0 to 5)
- 4. Resistance to tear (from 0 to 4)
- 2. Resistance to puncture (from 0 to 4)



Applications:

- Construction Works
- Lumber and mill works
- Glass sheet handling.
- Metal/aluminium sheet handling
- Installing fence / barb wire
- Machine parts assembling
- disassembling



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w: www.mallcom.in