





TECHNICAL INFORMATION

Input Power:	DC:24V
Long Life:	20,000 Hours
LED Chip Type:	SMD
CRI:	>80
Operation Temperature:	-20°C to +45°C
Dimmable:	No
Beam Angle:	120°
Color Temperature:	3000K
Dimension:	10mm
Watts per meter:	12
lumens per watt:	140
Lumens per meter:	1680
Current per meter:	0.5A
Roll Qty:	5M













FEATURES

- Stable SMD technology for better reliability and longer lifespan
- Low Voltage flexible ribbon available in DC:24V
- 5M Roll quantity
- Flexible installation: Cutting and reconnect the strip as you wish to suit your application
- $^{\bullet}\,$ Suitable for illuminating borders, edges, cabinets, bars and areas with limited space for installation




V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide an extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 212596 -

View more details

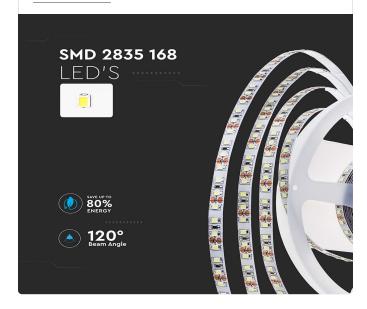



PACKAGING

Gross Weight (Kgs): 0.04 Unit CBM: 0.000185 Dimension: 10mm

MASTER BOX PACKAGING

Box Qty: 400 Length (Box) mm: 10 Width (Box) mm: 210 Height (Box) mm: 260

LISTING DETAILS

Commodity Code: 9405403990 Ean Code: 3800157676144