





TECHNICAL INFORMATION

| Watts: | 160 |
|------------------------|--------------------------|
| Lumens: | 20800 |
| Input Power: | AC:176-265V, 50/60Hz |
| Long Life: | 30,000 Hours |
| Unit Color: | Grey |
| Body Type: | Die-Cast Aluminium/ADC12 |
| PF: | >0.9 |
| LED Chip Type: | SMD 3030-Samsung Chip |
| CRI: | >70 |
| Operation Temperature: | -20°C to +45°C |
| Dimmable: | No |
| Beam Angle: | 150x80° |
| Color: | 4000K |
| Dimension: | 339x143x831mm |
| lumens per watt: | 130 |
| No. Of Led: | 180 |













FEATURES

- Powerful LED light source with lumen efficeincy of 130 LM/W
- Includes surge protection grade of 10KV
- IK protection IK10
- Designed with Inventronics driver 0-10V dimmable
- Designed with Type III M lens with beam angle of 150x80
- Suitable for streets, industrial facilities, cross roads and more

C€/EMC C€/LVD






130 LUMENS STREETLIGHT | LED LIGHTING

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 543 - 1581 939 View more details

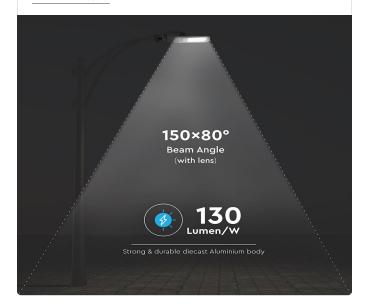

PACKAGING

Gross Weight (Kgs): 11.372 Unit CBM: 0.026554 339x143x831mm Dimension:

MASTER BOX PACKAGING

Box Qty: Qty Per Pallet: Length (Box) mm: 710 Width (Box) mm: 340 Height (Box) mm: 110

LISTING DETAILS

Commodity Code: 9405403990 EanCode: 3800157642729