


## **Product Specification Sheet**



## **Technical Information**

Instant Start:	0-100% in It1s
EQ-WATTS:	150
Output Voltage:	DC 30-42V
Watts:	45
Lumens:	3600
Shape:	Square
Input Current:	0.25A
Beam Angle:	120
Output Current:	1050mA
Unit Color:	White
Body Type:	ALUMINUM+PMMA+PP

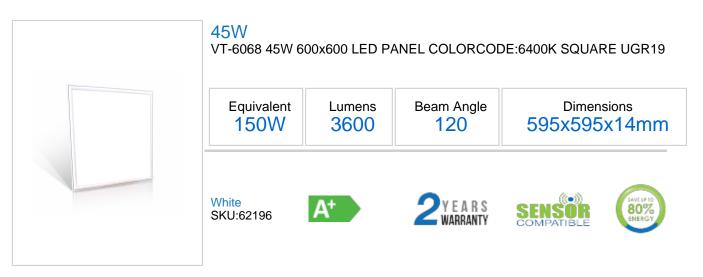

## **Features**

- Compare with incandescent, it can save over 80% electric cost Contemporary & Elegant Design
- Higher Light Transmission Rate
- Easy to install Plug and play version
- Dimmable options available
  - High quality power driver ensures reliable lifetime
  - Controlled Glare rating values for comfortable commercial applications
  - Range of Sizes to suit different workspaces
  - Instant Start 0-100% in
  - No flickering, No U.V Radiation
  - No Lead or Mercury content hence Environment friendly
  - Application Office, Conference Room, Showroom, Lobby, Cabin, Kitchen etc



Suitable & Recommended for maximum daily use of 10-12 hours, usage beyond this would void the warranty

## Packaging

Gross Weight(GW) Kgs     22.59     EAN Code     3800157609272       Length(Box)mm     650     Commodity Code     9405403990       Width(Box)mm     140         Height(Box)mm     630         Unit CBM     0.060282
Width(Box)mm 140   Height(Box)mm 630
Height(Box)mm 630
0.00282
Master Box Packaging
Master Box Qty (Pcs Per Carton) 6
Qty Per Pallet 20

