



TECHNICAL INFORMATION

Watts:	30
Lumens:	2100
Input Power:	AC:85-265V, 50/60Hz
Long Life:	30,000 Hours
Unit Color:	White
Body Type:	Aluminium
Cutting Size:	405x32mm
PF:	>0.9
LED Chip Type:	SMD-EPISTAR
CRI:	>80
Operation Temperature:	-25°C to +50°C
Dimmable:	No
Beam Angle:	160°
Color:	6400K
Dimension:	430x45x72mm



FEATURES

- Strong and sturdy Aluminium body
- Designed with high efficiency LED SMD-EPISTAR chips.
- Non Dimmable driver included
- No Lead or Mercury content hence Environment friendly
- Suitable for offices, conference rooms, showrooms, lobbies, cabins, kitchens etc.

CE/EMC

CE/LVD



LINEAR LIGHTS 3D

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.


One brand, endless solutions..

SKU: 6418 - 932 940

[View more details](#)

SMD LED'S

Efficient High quality LED Chips & Integrated Driver

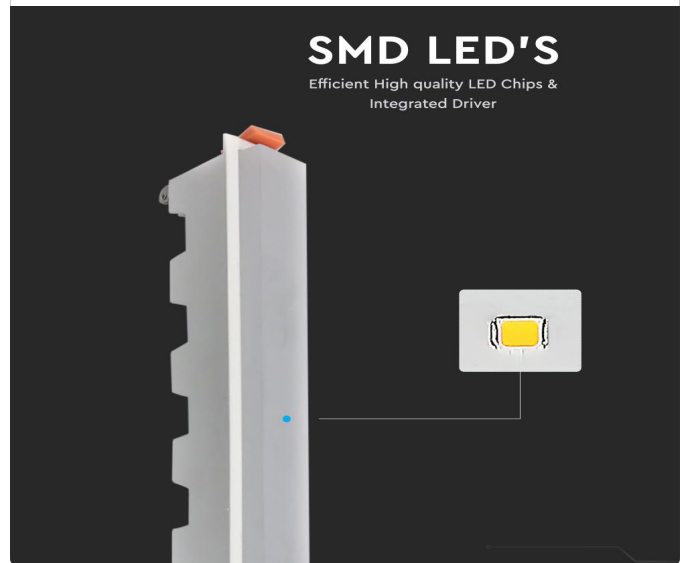

PACKAGING

Gross Weight (Kgs): 0.954
Unit CBM: 0.002457
Dimension: 430x45x72mm

MASTER BOX PACKAGING

Box Qty: 10
Qty Per Pallet: 450
Length (Box) mm: 455
Width (Box) mm: 90
Height (Box) mm: 60

LISTING DETAILS

Commodity Code: 9405403990
EanCode: 3800157626798