





Lumens:	3500	
Body Type:	Aluminium	
LED Chip Type:	SMD	
Dimmable:	No	
Beam Angle:	120°	
Color Temperature:	6400K	
Dimension:	900x320x50mm	
Output Voltage:	3.2V	
Battery Type:	40Ah	
Charging Time:	4-6 Hours	
Working Time:	8-10 Hours	
Solar Panel:	40W	




V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide an extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions...

SKU: 6758 -

View more details

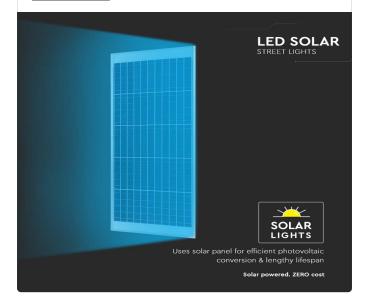







FEATURES

- $^{\bullet}\,$ Uses Solar Panel for efficient photovoltaic conversion and lengthy lifespan
- Remote Control with Radar Sensor and Auto and Timer function
- Easy Installation No Wiring
- 40W, 3.2V Polycrystalline Silicon Panel
- 2000lm in Auto on Mode & 3500lm in Sensor Mode
- $^{\bullet}\,$ Working time 8-10 Hours in always mode and 12 Hours in induction mode
- Zero electricity cost Solar Powered
- Suitable for Pathways, Garden, Patio and similar outdoor environment



PACKAGING

Gross Weight (Kgs): 8.45 Unit CBM: 0.05

Dimension: 900x320x50mm

MASTER BOX PACKAGING

Box Qty: 2 Length (Box) mm: 380 Width (Box) mm: 110 Height (Box) mm: 1040

LISTING DETAILS

Ean Code: 3800157686914