





TECHNICAL INFORMATION Body Type: Aluminium LED Chip Type: SMD Dimmable: No Beam Angle: Color Temperature: 4000K Dimension: Output Voltage: 3.2V Battery Type: 60Ah Charging Time: 4-6 Hours





Working Time:

Solar Panel:



FEATURES

 $^{\bullet}\,$ Uses Solar Panel for efficient photovoltaic conversion and lengthy lifespan

8-10 Hours

50W

- Remote Control with Radar Sensor and Auto and Timer function
- Easy Installation No Wiring
- 50W, 3.2V Polycrystalline Silicon Panel
- 2200lm in Auto on Mode & 4300lm in Sensor Mode
- $^{\bullet}\,$ Working time 8-10 Hours in always mode and 12 Hours in induction mode
- Zero electricity cost Solar Powered
- Suitable for Pathways, Garden, Patio and similar outdoor environment




SOLAR STREETLIGHTS | LED LIGHTING

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide an extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 6759 -

View more details

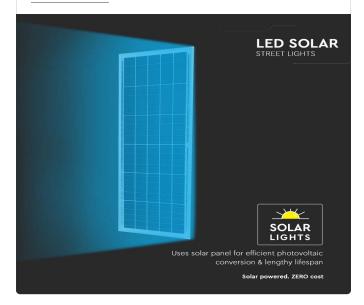

PACKAGING

Gross Weight (Kgs): 9.7
Unit CBM: 0.054733
Dimension: 1000x320x50mm

MASTER BOX PACKAGING

Box Qty: 2 Length (Box) mm: 380 Width (Box) mm: 110 Height (Box) mm: 1140

LISTING DETAILS

Ean Code: 3800157686921