





TECHNICAL INFORMATION

Watts:	6
Lumens:	660
Shape:	Round
Input Power:	AC:220-240V, 50/60Hz
Long Life:	20,000 Hours
Unit Color:	Grey
Body Type:	Aluminium
PF:	>0.45
LED Chip Type:	SMD
CRI:	>80
Operation Temperature:	-25°C to +50°C
Dimmable:	No
Beam Angle:	120°
Color:	4000K
Dimension:	140x115x100mm









FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Elegant replacement for traditional up-down lighting
- $^{\bullet}\,$ Fitted with high quality SMD chips for better reliability and longer lifespan
- Robust Aluminium build for efficient heat dissipation
- Suitable for living rooms, pathways, balconies, facades etc.

C€/EMC C€/LVD






ROUND BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 7092 - 1253 939 View more details

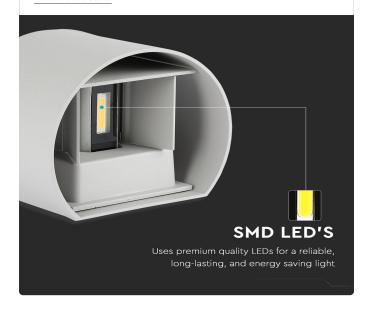

PACKAGING

Gross Weight (Kgs): 0.805
Unit CBM: 0.00198
Dimension: 140x115x100mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 500 Length (Box) mm: 150 Width (Box) mm: 120 Height (Box) mm: 110

LISTING DETAILS

Commodity Code: 9405403990 EanCode: 3800157616928