



### TECHNICAL INFORMATION

Watts:	2.5
Lumens:	100
Input Power:	AC:200-240V,50/60Hz
Body Type:	PC+PMMA
LED Chip Type:	SMD
Operation Temperature:	0°C to +45°C
Color Temperature:	6000K
Dimension:	350x29x195mm
Emergency Standby Watts:	2.5
Battery Type:	Ni-cd AA, 3.6V, 0.6Ah
Charging Time:	12 hours
Battery Charging Current:	60mA
Battery Discharge Current:	150mA
Emergency Operation Time:	>3 Hours
No. Of Led:	40


### 4IN1 EXIT LIGHT | LED LIGHTING

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide an extended multi-year warranty on our products, as well as detailed support.

*One brand. endless solutions..*

SKU: 7675 - 2.5

[View more details](#)

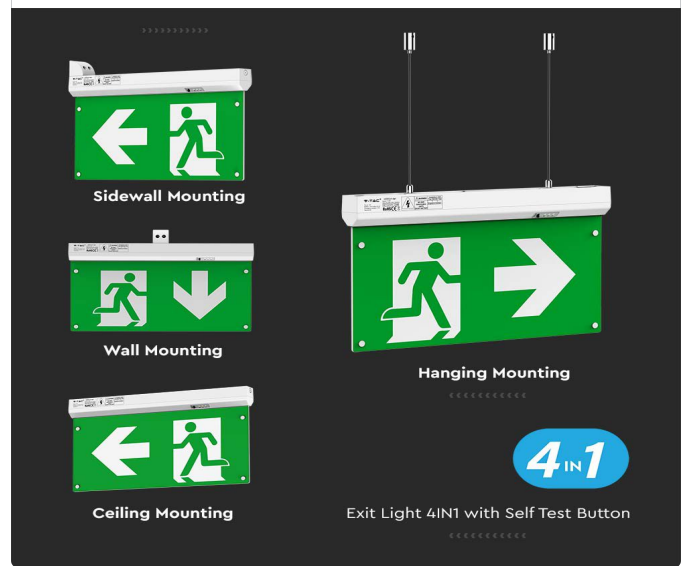

**IP20**  
RATING



**3 YEAR**  
WARRANTY

### FEATURES

- Fitted with high efficiency LED Chips
- High-performance Ni-cd AA, 3.6V, 0.6Ah battery for Longevity & low maintenance
- Low energy consumption only 2.5 watts
- Viewing distance of 30 meters both sides
- 4IN1 Suspended, Ceiling, Wall Mount and Side Wall Mount Installation
- Green light indicator test button
- 4 ways different legends included
- Reliable Emergency backup of >3 hours
- Maintained operation

### PACKAGING

Gross Weight (Kgs): 0.73  
Unit CBM: 0.00346  
Dimension: 350x29x195mm

### MASTER BOX PACKAGING

Box Qty: 10  
Length (Box) mm: 200  
Width (Box) mm: 43  
Height (Box) mm: 360

### LISTING DETAILS

Ean Code: 3800157685887