



### TECHNICAL INFORMATION

Lumens:	1050
Input Power:	DC:3.2V
Long Life:	20,000 Hours
Unit Color:	Black
Body Type:	Aluminium
LED Chip Type:	SMD
CRI:	>70
Operation Temperature:	-20°C to +45°C
Dimmable:	No
Beam Angle:	120°
Color:	4000K
Dimension:	247x65x210mm
Battery Type:	Ni-Cd 3.2V, 10000mAh Battery
Charging Time:	4 Hours
Working Time:	8 Hours
Solar Panel:	16W



### FEATURES

- Solar Powered Floodlight - Zero electricity cost.
- Designed with Remote control, Auto and timer function.
- Flexible installation, designed with solar panel with 5 meter wire length
- Perfectly built for outdoor with Ingress protection of IP65
- Suitable for Pathways, Garden, Patio and similar outdoor environment

CE/EMC

CE/LVD




### SOLAR FLOODLIGHTS | LED LIGHTING

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

*One brand, endless solutions..*

SKU: 8574 - 938

[View more details](#)

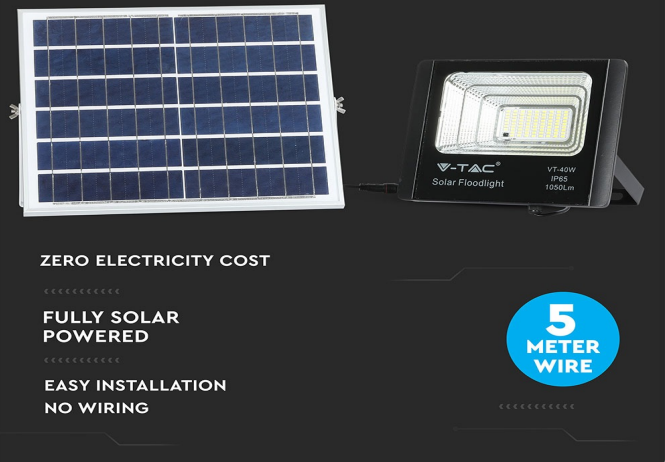

### PACKAGING

Gross Weight (Kgs):	2.847
Unit CBM:	0.0105
Dimension:	247x65x210mm

### MASTER BOX PACKAGING

Box Qty:	6
Qty Per Pallet:	180
Length (Box) mm:	100
Width (Box) mm:	300
Height (Box) mm:	350

### LISTING DETAILS

Commodity Code:	9405403990
EanCode:	3800157645591