


Step to connect CPI and COL button

TS-UTB-PRO useful tips

2021/12/27

Step 1. Plug in the provided 12P Wiring harness with the TS-UTB-PRO

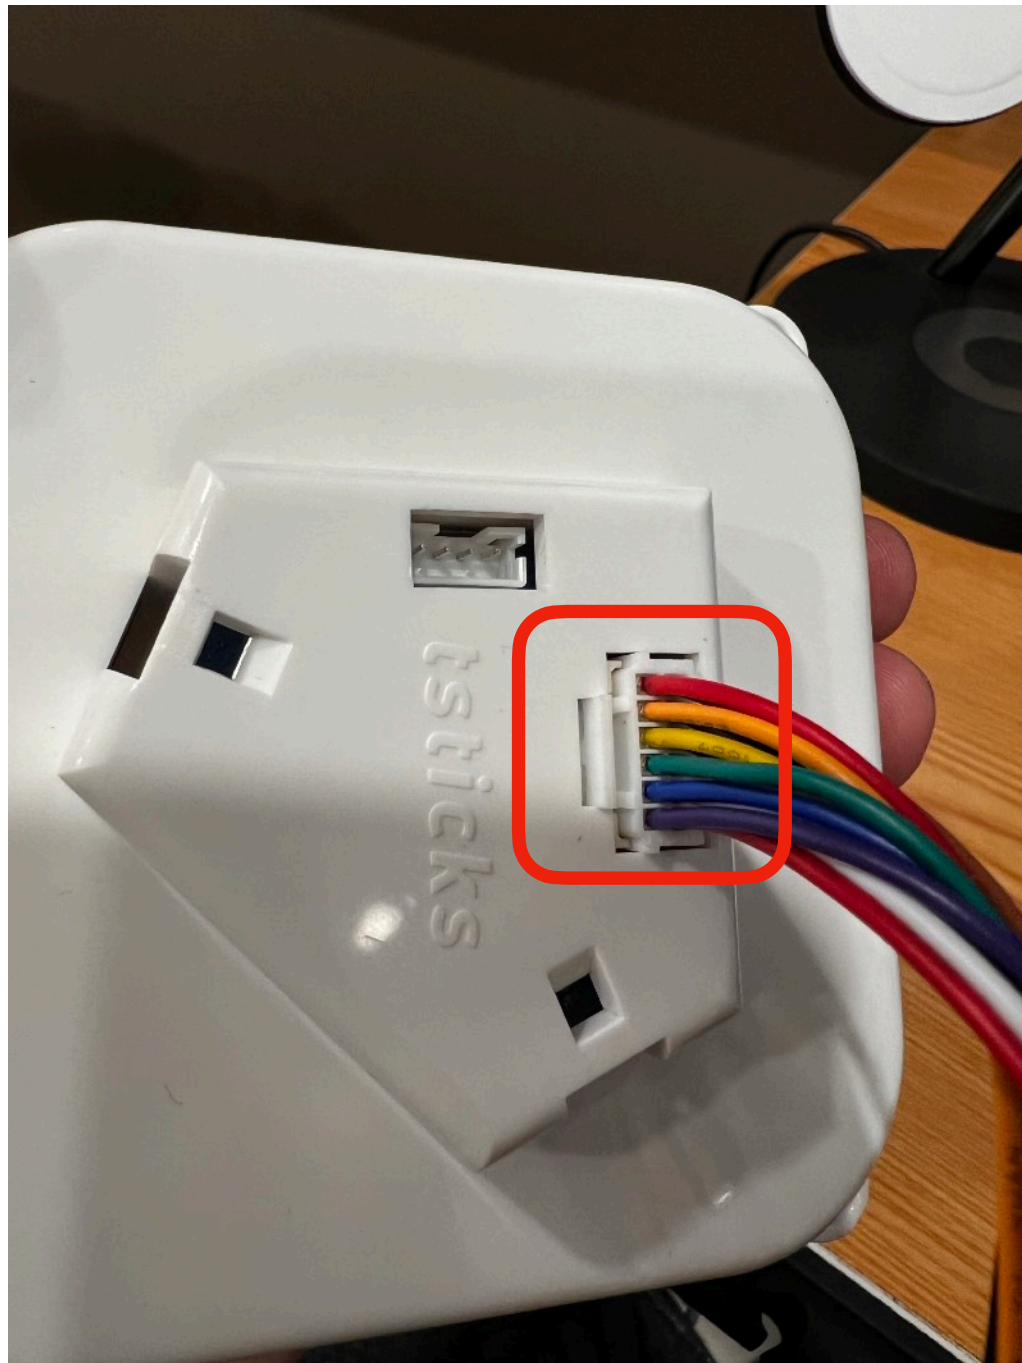


Wire color instruction

CPI	COL
Scroll down	GND
Scroll up	GND
Middle button	RX
R-click	TX
L-click	VCC

Step 2. Connect the CPI button with TS-UTB-PRO


Connect CPI and GND PIN with a button

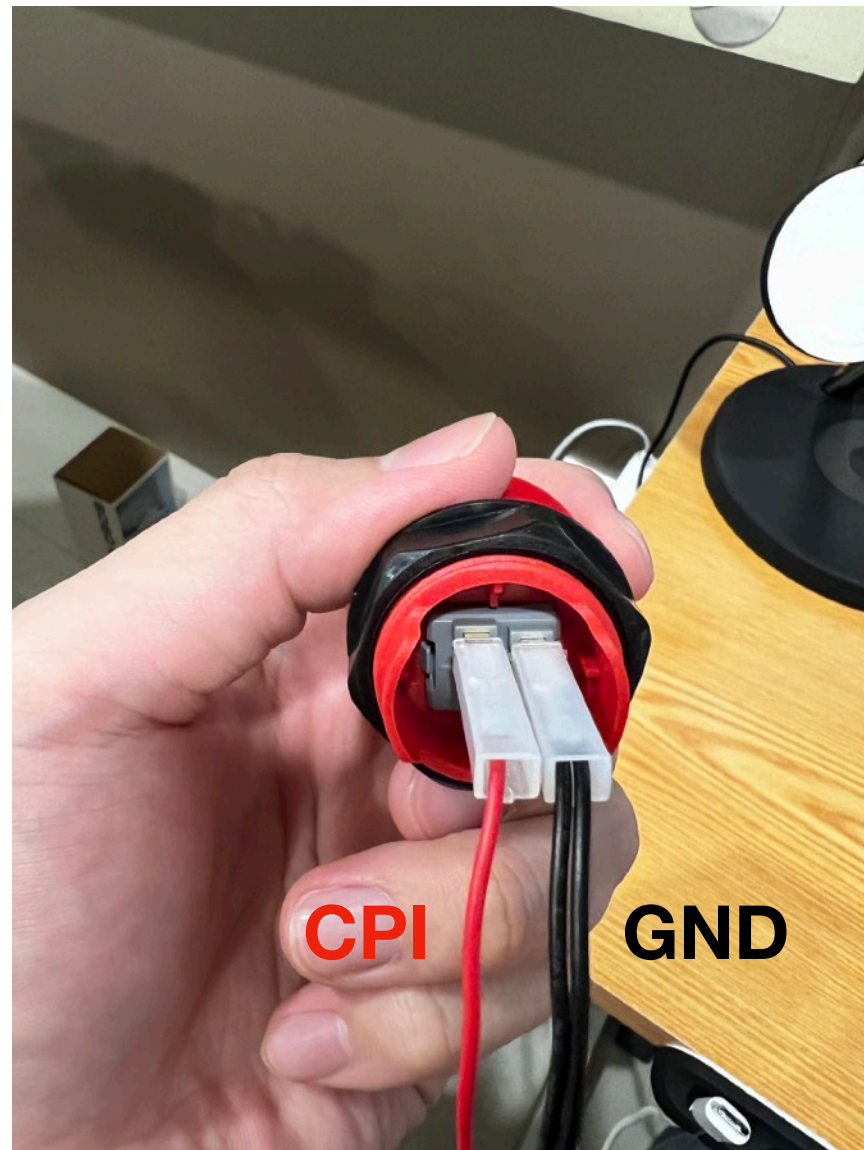

Connect COL and GND PIN with a button



Step 3. Connect the USB cable to the TS-UTB-PRO

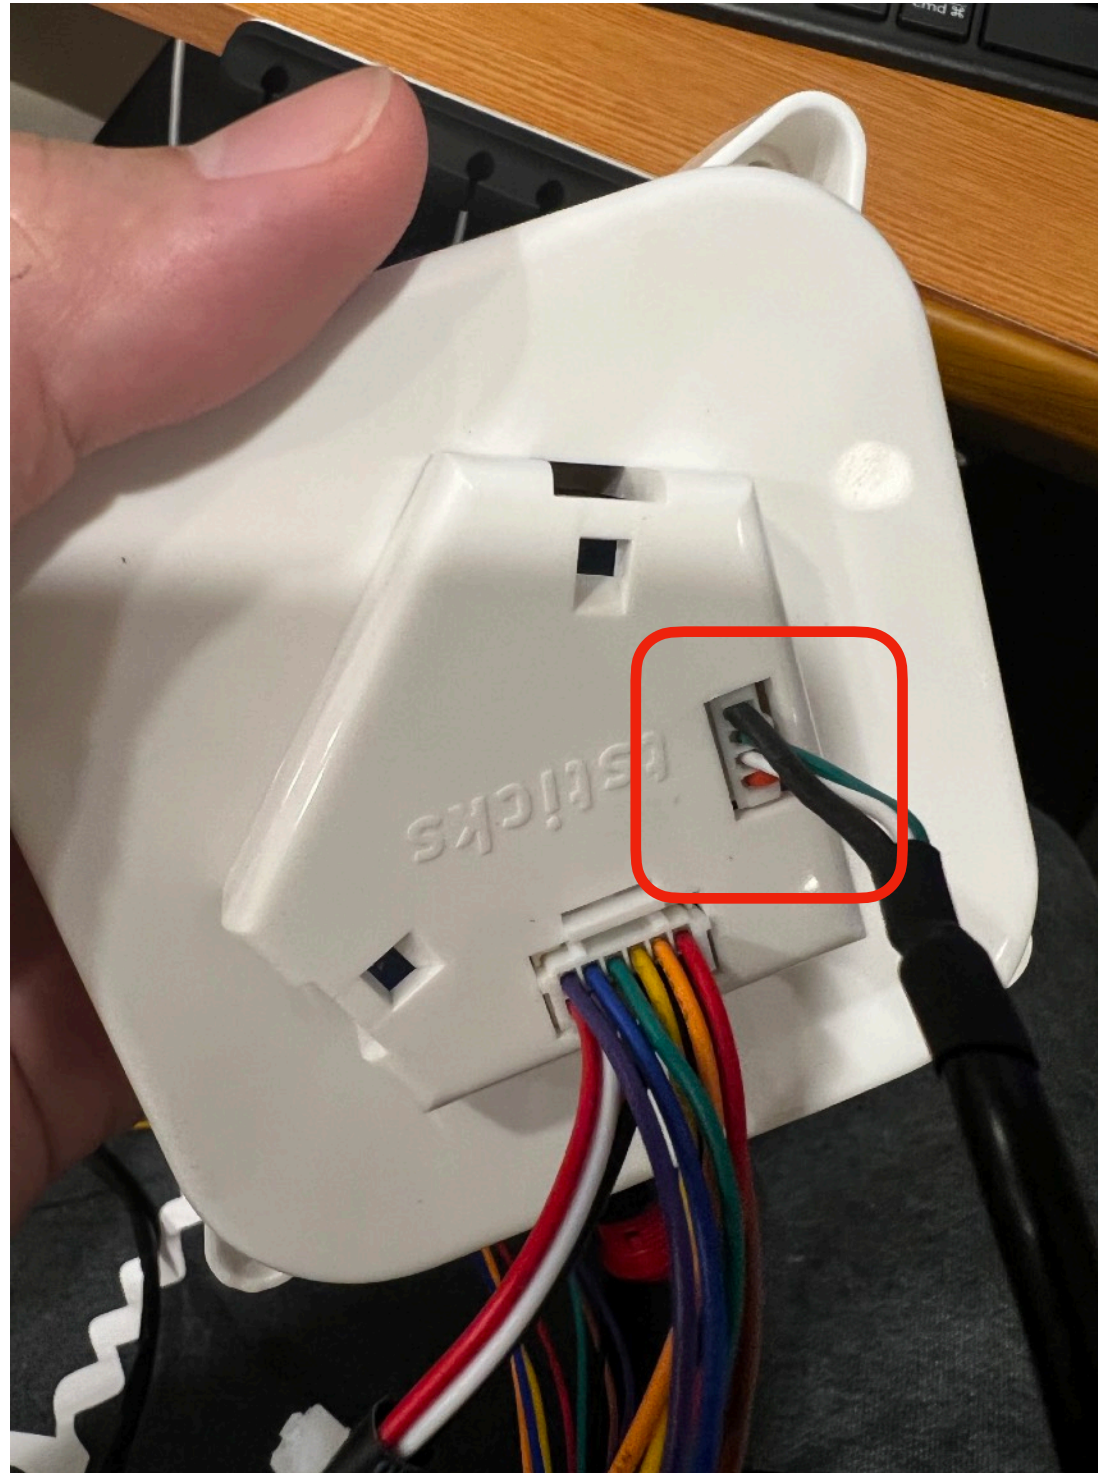


Step 4. Switched trackball mode between T T L mode for arcade1up and USB mode

4.1 hold the COL button



4.2 While COL button is still on hold, connect the USB to any USB power source(PC, Power adaptor)

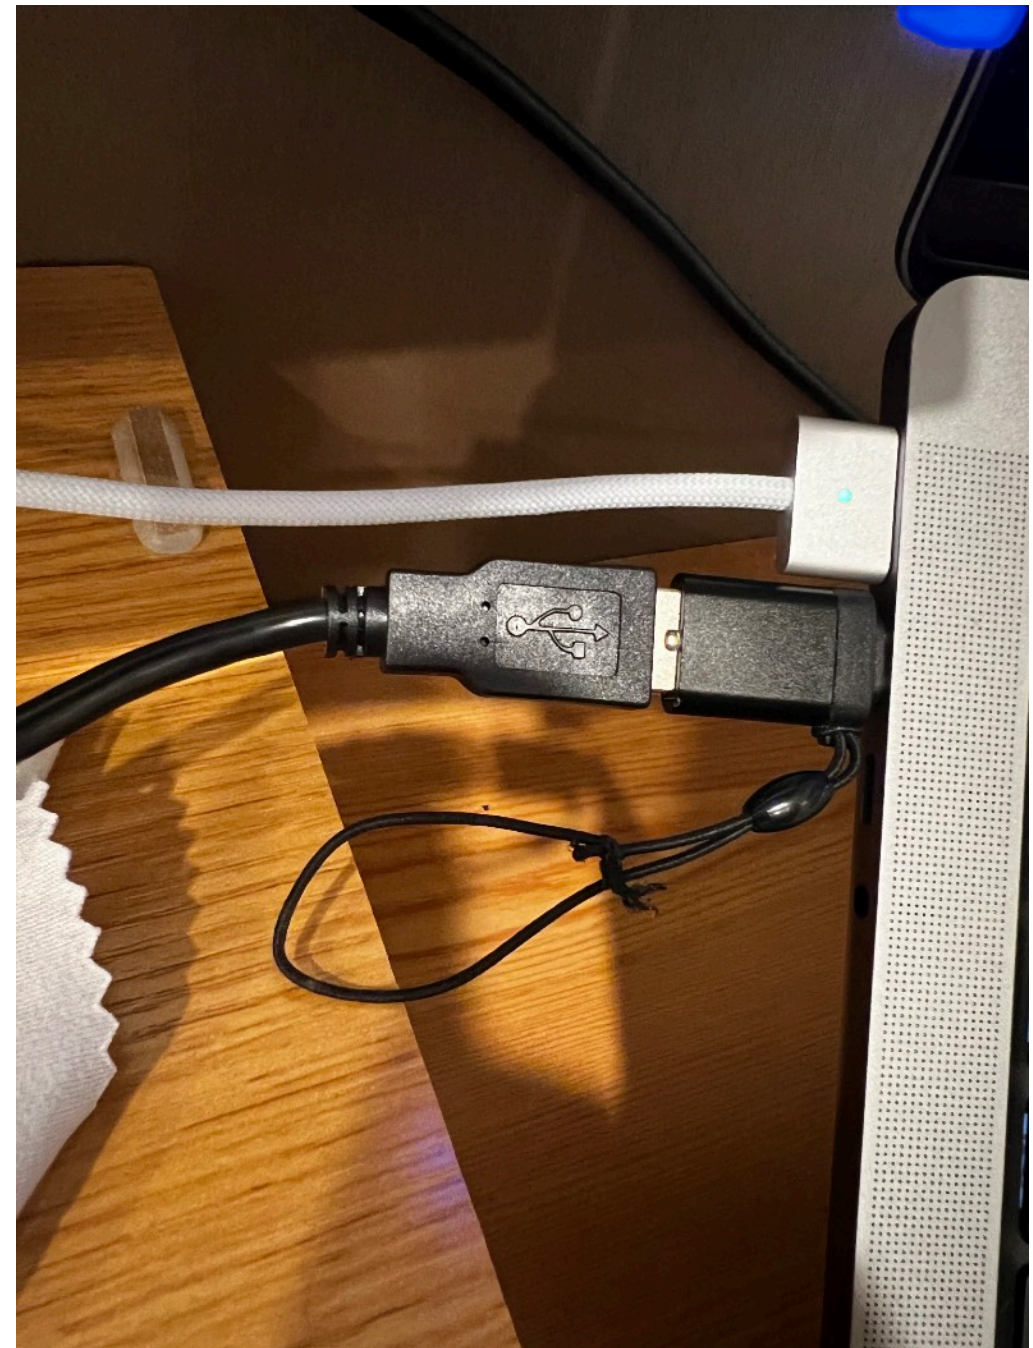

Step 5. Verify trackball mode

5.1 Red light blinks after powered ON to indicate TTL(For **arcade1up**) mode is successfully configured

5.2 If blue light blinks after powered ON to indicate USB mode is successfully configured

(If you want to switch between different modes, repeat step 4)

