

AMERICAN REBEL™

CONCEALED AND SAFE

America's Patriotic Brand

CONCEALED AND SAFE



2022
PRODUCT CATALOG



WELCOME TO
**AMERICAN
REBEL™**
America's Patriotic Brand

8460 | Nieman Rd.
Lenexa, KS 66014

It's a time in America when national spirit and American values are being rekindled and redefined. American Rebel has a strong belief in the Constitution and is an advocate for the 2nd Amendment. We convey a sense of responsibility to teach and preach good common practices of gun ownership. There's a growing need to know how to protect yourself, your family, your neighbors or even a room full of total strangers. That need is in the forethought of every product we design. The concealed carry lifestyle refers to a set of ideas around the decision to carry a gun everywhere you go. The American Rebel brand strategy is similar to the successful Harley-Davidson Motorcycle philosophy. A former chief executive at Harley-Davidson said, "It's not hardware; it is a lifestyle, an emotional attachment." American Rebel makes a statement about who somebody is.



ANDY
AMERICAN REBEL CEO

VAULT DOORS

THE VAULT DOOR WITH AN

**AMERICAN
REBEL™**
America's Patriotic Brand

In-Swing| Out-Swing Vault Doors

When you need something more than a safe, vault rooms can be the ideal solution for security and protection. Whether it's a safe room, a shelter, or a place to consolidate your valuable property, our American Rebel In-Swinging and Out-Swinging Vault Doors add the critical functionality to an amazing vault room.

Our new Vault Doors are constructed with the same strength and rugged independence that America was built upon. Made in America, homes with Vault Rooms increase in value by 3.5% and return 84% of the original investment.



AR-VO (Out-Swing)



AR-VI (In-Swing)



Made in the USA





AR

Black Smoke


Our new Vault Doors are constructed with the same strength and rugged independence that America was built upon.

| | |
|---------------------------|-----------------------------|
| 24 | 850 |
| GAUGE STEEL INNER DOOR | APPROXIMATE TOTAL WEIGHT |
| ALL ACTIVE DOOR BOLTS | DOUBLE-PLATE STEEL DOORS |

| | |
|-----------------------------|-----------------------------------|
| Outer Door Thickness | 1/4" ASTM Certified USA Steel |
| Boltworks | Radial Gear |
| Diameter Door Bolts | 1 1/2" All Active Bolts |
| Door Hinges | (3) 1 1/4" Bronze Bearing |
| Fire Insulation | 3 Layers of 5/8" Fire Code Type X |

| | | |
|------------------|-----------------------------|-----------------------|
| DOOR DIM. | Overall Dimension | 44 3/8" W x 85 1/8" H |
| | Door Size | 35 7/8" W x 79 5/8" H |
| | Door Depth | 10" to back of Frame |
| | Flange Dimension | 37" W x 81" H x 8" D |
| | Door Assembly Weight | 850 lbs. |

| | |
|-------------------------------|-----------------------|
| Rough Door Opening | 38" W x 83" H |
| Minimum Door Opening | 37 1/2" W x 81 3/4" H |
| Anchor Bolt Openings | 30 3/8" Diameter |
| Minimum Wall Thickness | 6" |

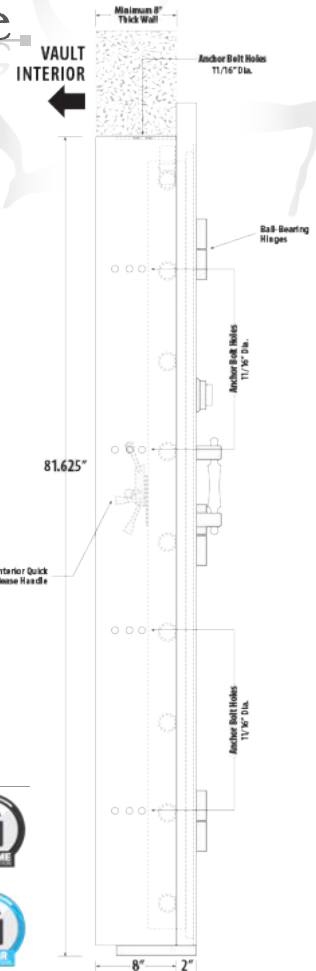

EXTENDED WTY

- LIFETIME (Orange padlock icon)
- LIFETIME (Black padlock icon)
- 10 YEAR (Grey padlock icon)
- 10 YEAR (Blue padlock icon)





THE SAFE WITH AN

AR

Black Smoke

The In-Swing Vault Door

The same quality construction in an American-made Vault Door as our Out-Swing Vault Door.



21

GUAGE STEEL
INNER DOOR

LOCKING
BOLTS

950

DIAMETER
DOOR BOLTS


DOUBLE PLATE
STEEL DOORS

| | |
|-----------------------------|-----------------------------------|
| Outer Door Thickness | 1/4" ASTM Certified USA Steel |
| Boltworks | Radial Gear |
| Diameter Door Bolts | 1 1/2" All Active Bolts |
| Door Hinges | (3) 1 1/4" Bronze Bearing |
| Fire Insulation | 3 Layers of 5/8" Fire Code Type X |

DOOR DIM.

| | |
|-----------------------------|--------------------------|
| Overall Dimension | 42 3/4" W x 83 3/4" H |
| Door Size | 33 1/2" W x 76" H |
| Door Depth | 10 1/2" to back of Frame |
| Flange Dimension | 37" W x 81" H x 9 3/4" D |
| Door Assembly Weight | 950 lbs. |

| | |
|-------------------------------|-----------------------|
| Rough Door Opening | 38" W x 83" H |
| Minimum Door Opening | 37 5/8" W x 81 3/4" H |
| Anchor Bolt Openings | (20) 5/8" Diameter |
| Minimum Wall Thickness | 6" |

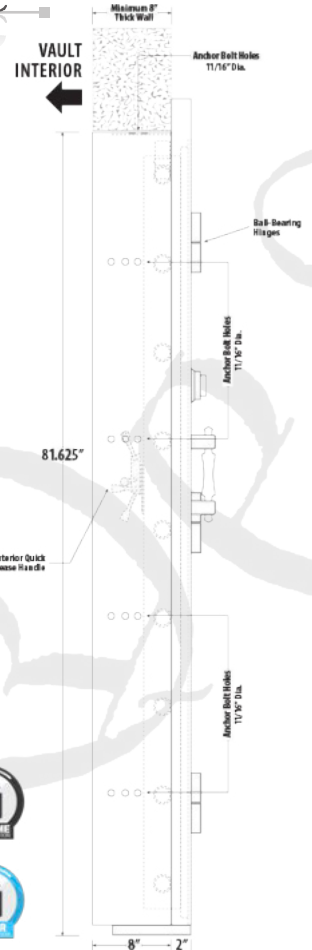

EXTENDED WTY

