





Premium Quality Safes You Can Trust

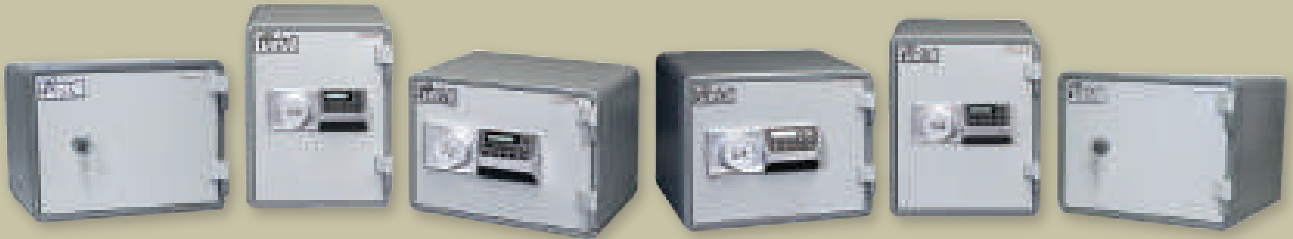

Safes for Every Application - Commercial • Residential • Small Businesses

AMERICA'S SAFE COMPANY

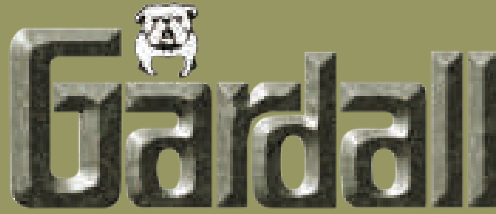

The Finest Fire and Burglary Protection Available Anywhere in the World!

Gardall designs and manufactures fire and burglary resistive safes to meet or exceed many different standards and specifications.

Standard Safe Classifications

To understand how our safes are classified, here is a brief explanation of the labels you'll find on them.

Fire Protection – Two-Hour 1850° or One-Hour 1700°

Gardall fire-resistive safes meet or exceed Underwriters' Laboratories specifications for explosion, fire endurance and drop tests.

Two-Hour exposure to severe fire with an exterior temperature to 1850°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for two hours and cool down.



One-Hour exposure to severe fire with an exterior temperature to 1700°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for one hour and cool down.



Residential Security Container Burglary Label

Gardall's 2-Hour Burglary Fire (pg. 2), BF and FB models have passed the U.L.-R.S.C. label test for burglary protection.



Burglary Protection

Gardall safes with the Class "B" or Class "C" Burglary Insurance Rating allow you to receive insurance coverage in accordance with the Broad Form and Mercantile Safe Insurance classifications. Pertinent insurance information is available from Insurance Service Office, 160 Water Street, New York, NY 10038.

Gardall safes can be supplied with an Underwriters' Laboratory Group II combination lock, U.L. listed key-op lock, U.L. listed dual key lock or a U.L. listed push button electronic lock.

Gardall Lifetime Replacement Warranty

Gardall Safe Corporation assures to the original end consumer, replacement – free of charge – of any Gardall Fire-Resistive Record Safe damaged beyond repair by fire with a then-current production model of a comparable value. This warranty is exclusive and in lieu of any warranty of merchantability, fitness for particular purpose or other warranties of qualities, whether expressed or implied, and of all other liabilities and obligations on the manufacturer's part.

Gardall Safe Corporation reserves the right to inspect any record safe prior to replacement. Copies of insurance reports or documents pertaining to fire loss will be furnished to Gardall Safe Corporation upon request.

Gardall Safe Corporation specifically assumes no liability for installation or other charges incurred by the owner in connection with the replacement of any record safe and assumes no liability for damage to contents or personal property contained in any such file or any consequential damages of any nature or description.



Your Best Protection Against Robbery and Fire



U.L. Listed
Composite Safes

Gardall Safe Corporation has been manufacturing premium quality safes for home and office applications since 1950. Our Commercial High Security safes are manufactured to specifications which are more stringent than many of our competitors requirements. Some of the standard features on Gardall TL15 and TL30 safes are options with other manufacturers. Please be sure to compare our specifications with those of our competitors before making your decision.

- **UL TL15** – Tool Resistant for 15 minutes
- **UL TL30** – Tool Resistant for 30 minutes
- **UL TL30X6** – Tool Resistant for 30 minutes all six sides of safe.

Standard Features:

Door Construction:

- TL15 – 5½" slab High Density Fiber Reinforced Material
- TL30 – 5½" overall, 3" slab of High Density Fiber Reinforced Barrier Material – TDR11*
- TL30x6 – TL30x6 – 5½" overall thickness with 2" Defense Barrier

Body Construction:

- TL15 – 2½" slab of High Density Barrier Material
- TL30 – 2½" slab of High Density Barrier Material
- TL30x6 – 2½" thick composite Reinforced Manganese steel armor plate

Anti Burglary Components:

- Cross locking relockers.
- Punch resistant spindle handle and lock.
- Tempered glass reloading trigger.
- Bridge mounted lock.
- Formed 1/8" stainless steel locking bar 1½" depth.

Locks:

- Group 2M listed combination. Key lock available for dual custody.

Hinges:

- Massive heavy duty adjustable ball bearing hinges.

Fire Rating:

- Fire tested to 1850°F. Interior temperature less than 350°F for 1 hour.

	Model	Outside Dimensions			Inside Dimensions			Approx. Cubic Ft.	Approx. Weight*	Shelves
		H	W	D	H	W	D			
TL15	1818T15	23"	23"	20¼"	18"	18"	12"	2.25	660	1
	2218T15	27"	23"	22½"	22"	18"	17"	3.9	875	1
	3822T15	43"	27"	28½"	38"	22"	20"	9.7	1440	2
	5022T15	55"	27"	28½"	50"	22"	20"	12.7	1895	3
	6222T15	67"	27"	28½"	62"	22"	20"	15.8	2350	4
TL30	1818T30	23"	23"	20¼"	18"	18"	12"	2.25	690	1
	2218T30	27"	23"	25½"	22"	18"	17"	3.9	920	1
	3822T30	43"	27"	28½"	38"	22"	20"	9.7	1530	2
	5022T30	55"	27"	28½"	50"	22"	20"	12.7	1940	3
	6222T30	67"	27"	28½"	62"	22"	20"	15.8	2300	4
	7236T30	77"	41"	28½"	72"	36"	20"	30	3430	4
TL30X6	1818T30X6	23"	23"	20½"	18"	18"	12"	2.25	850	1
	2218T30X6	27"	23"	25½"	22"	18"	17"	3.9	1125	1
	3822T30X6	43"	27"	28½"	38"	22"	20"	9.7	1960	2
	5022T30X6	55"	27"	28½"	50"	22"	20"	12.7	2400	3
	6222T30X6	67"	27"	28½"	62"	22"	20"	15.8	2840	4
	7236T30X6	77"	41"	28½"	72"	36"	20"	30	4230	4

*Add 72-100 lbs. to weight above for skid/shipping weight. All safes have bolt down holes for anchoring.

Gardall

SAFE CORPORATION

Manufacturing Premium Quality Safes Since 1950

