





Premium Quality Safes You Can Trust

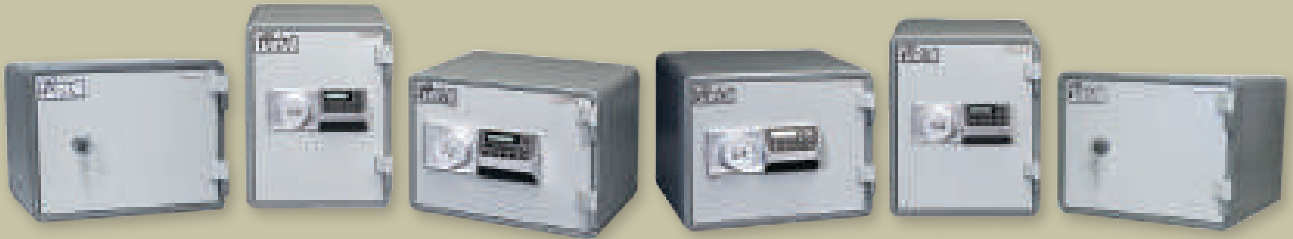

Safes for Every Application - Commercial • Residential • Small Businesses

AMERICA'S SAFE COMPANY

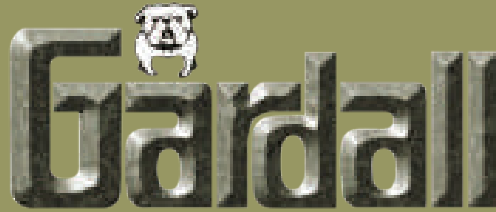

The Finest Fire and Burglary Protection Available Anywhere in the World!

Gardall designs and manufactures fire and burglary resistive safes to meet or exceed many different standards and specifications.

Standard Safe Classifications

To understand how our safes are classified, here is a brief explanation of the labels you'll find on them.

Fire Protection – Two-Hour 1850° or One-Hour 1700°

Gardall fire-resistive safes meet or exceed Underwriters' Laboratories specifications for explosion, fire endurance and drop tests.

Two-Hour exposure to severe fire with an exterior temperature to 1850°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for two hours and cool down.



One-Hour exposure to severe fire with an exterior temperature to 1700°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for one hour and cool down.



Residential Security Container Burglary Label

Gardall's 2-Hour Burglary Fire, BF and FB models have passed the U.L.-R.S.C. label test for burglary protection.



Burglary Protection

Gardall safes with the Class "B" or Class "C" Burglary Insurance Rating allow you to receive insurance coverage in accordance with the Broad Form and Mercantile Safe Insurance classifications. Pertinent insurance information is available from Insurance Service Office, 160 Water Street, New York, NY 10038.

Gardall safes can be supplied with an Underwriters' Laboratory Group II combination lock, U.L. listed key-op lock, U.L. listed dual key lock or a U.L. listed push button electronic lock.

Gardall Lifetime Replacement Warranty

Gardall Safe Corporation assures to the original end consumer, replacement – free of charge – of any Gardall Fire-Resistive Record Safe damaged beyond repair by fire with a then-current production model of a comparable value. This warranty is exclusive and in lieu of any warranty of merchantability, fitness for particular purpose or other warranties of qualities, whether expressed or implied, and of all other liabilities and obligations on the manufacturer's part.

Gardall Safe Corporation reserves the right to inspect any record safe prior to replacement. Copies of insurance reports or documents pertaining to fire loss will be furnished to Gardall Safe Corporation upon request.

Gardall Safe Corporation specifically assumes no liability for installation or other charges incurred by the owner in connection with the replacement of any record safe and assumes no liability for damage to contents or personal property contained in any such file or any consequential damages of any nature or description.



**Your Best Protection
Against Robbery**



Keep your cash register trays secure when they are not being used. Reduce petty theft and loss from out of balance cash drawers.

Heavy Duty Cash Register Safe Standard Features

- Recessed door to help deter pry attacks.
- Hard plate around the lock, with independent relocker.
- Available with Rotary or Front Loading depository.
- Interiors – 2 adjustable shelves or 5 fixed shelves.
- UL listed, S&G Group II combination lock
- Anchoring holes in bottom to bolt safe down.
- 3–1" round bolts and full length dead bolt.
- Inside compartment 9"H x 21"W x 13"D (FL & GWB models)
- 1/2" plate steel door on Model 3522

Model	Outside Dimensions			Interior	H	W	D	Weight
	H	W	D					
FL2522/2	33¼"	22"	17"	Drop compartment with cam lock 2 adjustable, removable shelves				259
FL2522/5	33¼"	22"	17"	Drop compartment with cam lock 5 fixed location, removable shelves				275
GWB3522 •	35"	21¾"	16½"	Drop compartment with cam locks and 2 shelves, 1/2" plate steel door				307

• "B" rate construction Add 2" to outside depth for dial and handle.

FL compartment size 5½" x 21½" x 10½". GWB compartment size 8½" x 21¾" x 10½"

Gardall

SAFE CORPORATION

Manufacturing Premium Quality Safes Since 1950

