





Premium Quality Safes You Can Trust

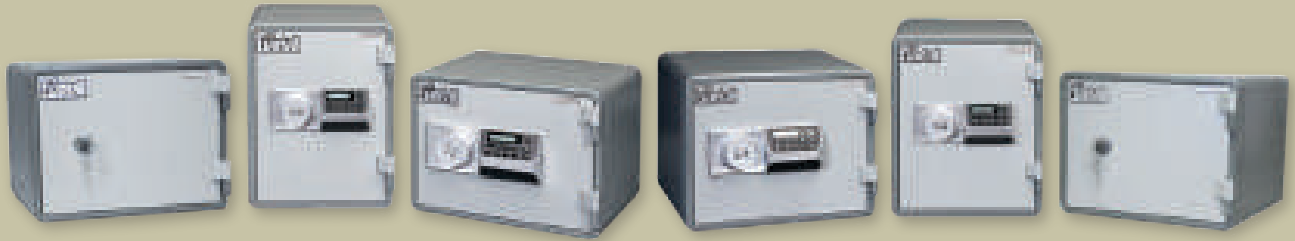

Safes for Every Application - Commercial • Residential • Small Businesses

AMERICA'S SAFE COMPANY

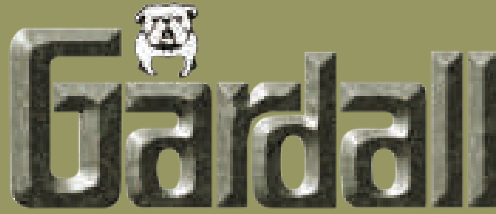

The Finest Fire and Burglary Protection Available Anywhere in the World!

Gardall designs and manufactures fire and burglary resistive safes to meet or exceed many different standards and specifications.

Standard Safe Classifications

To understand how our safes are classified, here is a brief explanation of the labels you'll find on them.

Fire Protection – Two-Hour 1850° or One-Hour 1700°

Gardall fire-resistive safes meet or exceed Underwriters' Laboratories specifications for explosion, fire endurance and drop tests.

Two-Hour exposure to severe fire with an exterior temperature to 1850°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for two hours and cool down.



One-Hour exposure to severe fire with an exterior temperature to 1700°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for one hour and cool down.



Residential Security Container Burglary Label

Gardall's 2-Hour Burglary Fire, BF and FB models have passed the U.L.-R.S.C. label test for burglary protection.



Burglary Protection

Gardall safes with the Class "B" or Class "C" Burglary Insurance Rating allow you to receive insurance coverage in accordance with the Broad Form and Mercantile Safe Insurance classifications. Pertinent insurance information is available from Insurance Service Office, 160 Water Street, New York, NY 10038.

Gardall safes can be supplied with an Underwriters' Laboratory Group II combination lock, U.L. listed key-op lock, U.L. listed dual key lock or a U.L. listed push button electronic lock.

Gardall Lifetime Replacement Warranty

Gardall Safe Corporation assures to the original end consumer, replacement – free of charge – of any Gardall Fire-Resistive Record Safe damaged beyond repair by fire with a then-current production model of a comparable value. This warranty is exclusive and in lieu of any warranty of merchantability, fitness for particular purpose or other warranties of qualities, whether expressed or implied, and of all other liabilities and obligations on the manufacturer's part.

Gardall Safe Corporation reserves the right to inspect any record safe prior to replacement. Copies of insurance reports or documents pertaining to fire loss will be furnished to Gardall Safe Corporation upon request.

Gardall Safe Corporation specifically assumes no liability for installation or other charges incurred by the owner in connection with the replacement of any record safe and assumes no liability for damage to contents or personal property contained in any such file or any consequential damages of any nature or description.



**Your Best Protection
Against Fire or Theft**

MADE IN THE U.S.A.

These Gardall fire resistive safes are designed and tested to withstand severe fire with outside temperatures reaching 1750°F for two hours. Safe interior temperatures will not exceed 350°F within two hours. The charring of paper occurs at 405°F. All Gardall fire resistive safes provide a comfortable margin that protects your valuables. But these models don't stop at just fire protection. They also have Class "B" burglary resistive features built in right at the factory.

And don't forget, every fire insurance policy states that "proof of loss" is required for claims. When your business or personnel inventories are locked inside a Gardall fire resistive safe, your "proof of loss" is protected 24 hours a day, 7 days a week.



Standard Features

- Five active locking bolts in a three-way configuration
- Three plated deadbolts extend into safe wall preventing entry if hinges are removed.
- Hard plate between the lock and dial ring.
- Independent relocking device designed to stop forced entry or drill attacks
- UL listed, S&G Group II combination lock
- Heavy duty casters to allow the safe to be positioned easily (welded on)
- **Gardall Lifetime Replacement Warranty** (see inside front cover)

Manufacturers 2-Hour Fire Label

A safe similar in construction was tested by an independent testing facility. The furnace temperature reached 1750°F for a period of time exceeding 2 hours, before the interior of the safe reached 350°F.

Lock Options

- Push Button Electronic
- Mechanical Combination
- Single Key (Key-op)

Standard colors: Gray or sandstone.

The above mentioned Gardall fire resistive safes carry a 2-hour Manufacturers Fire Label.

All specifications are subject to change without notice.



Model	Outside Dimensions			Inside Dimensions			Cubic Inches	Approx. Weight (lbs.)	Shelves
	H	W	D	H	W	D			
3620	43½"	25¾"	26¾"	36¼"	20½"	19½"	14,490	804	3
4220	49½"	25¾"	26¾"	42¼"	20½"	19½"	16,890	871	3
4820	55½"	25¾"	26¾"	48¼"	20½"	19½"	19,285	975	4

Add 2" to outside depth for dial and handle.

Gardall

SAFE CORPORATION

Manufacturing Premium Quality Safes Since 1950

