


# TRACKER SAFE

## SMALL PISTOL SAFE

PART NUMBER: SPS-01

### HOW TO CHANGE THE COMBO:

- 1) Turn the three wheel combination to factory code: 0-0-0 and turn the knob clockwise to the open position.
- 2) LEAVE THE KNOB TURNED.
- 3) Open the lid. On the underside of the lid, move the lever from the "A" position to the "B" position.
- 4) Set your personal combination by turning each of the three wheels to your desired number.
- 5) With the lid still open, turn the knob to the locked (counter-clockwise) position.
- 6) Return the lever on the underside of the lid from "B" to "A".
- 7) Your new combination is set.

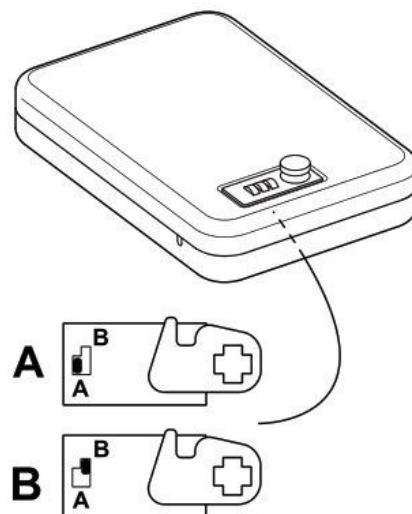

### SECURING THE SAFE

NOTE: The SPS-01 should be installed in a dry and secure area. Failure to secure the SPS-01 to a fixed object will compromise the safety and the security of the safe.


**CAUTION: KEEP SPS-01 OUT OF REACH OF CHILDREN.**

There are two ways to secure the SPS-01:

#### **1) Using the supplied cable:**

To secure the SPS-01 to a fixed object:

- a) Open your safe (see above instructions) and keep it in the open position.
- b) Loop the **small end** of the cable around the fixed object and then **through** the **large end** of the cable.
- c) Place the small end of the cable into the notch of the open safe.  
(Make sure the metal stud on the cable is inside the safe.)
- d) Close and lock the safe.

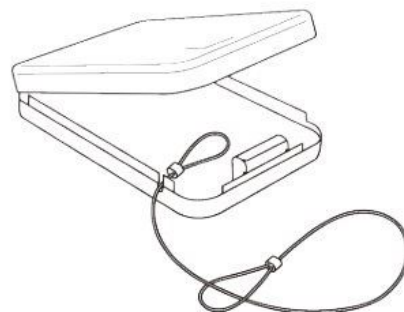

#### **2) Using the pre-drilled mounting holes:** (mounting hardware NOT included)

Your SPS-01 has two pre-drilled mounting holes in the bottom of the safe.

- a) Open your safe (see above instructions).
- b) Remove the inner foam padding.
- c) Locate the holes.
- d) Place the safe in the desired location.
- e) Install the proper hardware for the surface material you are mounting to.  
(mounting hardware NOT included)