

TRACKER SAFE

SMALL PISTOL SAFE PART NUMBER: SPS-02

IMPORTANT

- 1) Keep keys in a secure place away from children.
- 2) Keep SPS-02 out of reach of children.
- 3) Register your Tracker Safe online at <http://trackersafe.com/pages/warranty-registration>.

OPERATING THE KEY LOCK

- 1) Insert the key.
- 2) Turn clockwise.
- 3) Lift top lid to open.



SECURING THE SAFE

NOTE: The SPS-02 should be installed in a dry and secure area. Failure to secure the SPS-02 to a fixed object will compromise the safety and the security of the safe.


CAUTION: KEEP SPS-02 OUT OF REACH OF CHILDREN.

There are two ways to secure the SPS-02:

1) Using the supplied cable:

To secure the SPS-02 to a fixed object:

- a) Open your safe (see above instructions) and keep it in the open position.
- b) Loop the **small end** of the cable around the fixed object and then **through** the **large end** of the cable.
- c) Place the small end of the cable into the notch of the open safe.
(*Make sure the metal stud on the cable is inside the safe.*)
- d) Close and lock the safe.

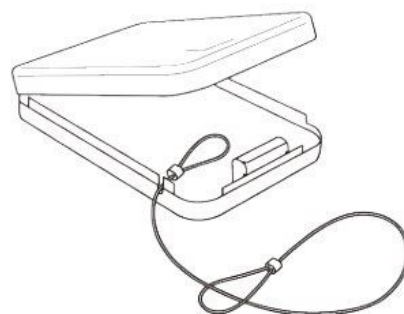

2) Using the pre-drilled mounting holes: (*mounting hardware NOT included*)

Your SPS-02 has two pre-drilled mounting holes in the bottom of the safe.

- a) Open your safe (see above instructions).
- b) Remove the inner foam padding.
- c) Locate the holes.
- d) Place the safe in the desired location.
- e) Install the proper hardware for the surface material you are mounting to.
(*mounting hardware NOT included*)