


## CAR


Compuertas antirretorno metálicas. Impiden la entrada de olores, corrientes de aire y evitan fugas de calefacción cuando el extractor no funciona. Se instalan entre el extractor y el conducto.

Modelo	ØA	B	C	D	E	F
CAR-80	80	37	35	82	-	-
CAR-100	100	35	31	80	-	-
CAR-110	110	47	45	112	-	-
CAR-125	125	45	43	100	-	-
CAR-150	150	55	53	120	-	-
CAR-160	160	55	53	120	-	-
CAR-200	200	65	63	140	-	-
CAR-250	250	65	63	140	-	-
CAR-315	315	65	63	140	50	45
CAR-355	355	65	63	140	50	45
CAR-400	400	100	140	250	80	80
CAR-500	500	100	190	300	80	80


CAR-100 / CAR-250



CAR-315 / CAR-500

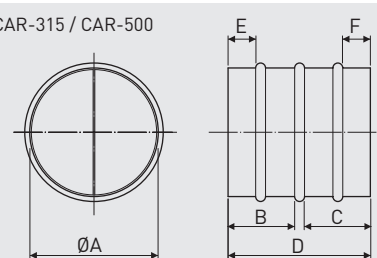

## Pérdida de carga

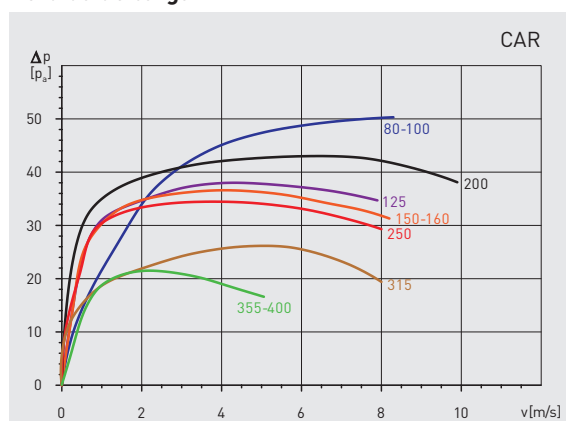

## CM-130

Compuerta antirretorno de plástico. Impide la entrada de olores, corrientes de aire y evita fugas de calefacción cuando el extractor no funciona. Se instalan entre el extractor y el conducto.

Modelo	Diámetros (mm)
CM-130	113/122 - 118/127

