



SWEEPERS - RIDER

# 1280

The 1280 Sweeper is a compact and maneuverable ride-on sweeper with a choice of three work programs to make cleaning of large surfaces easy and efficient.

**MOST FREQUENT USE**



**MAX PRODUCTIVITY**

68,000 ft<sup>2</sup>/h

**BATTERY RUN TIME**

2.5-5.2h

**KEY SPECS**

48" cleaning path  
28 gal capacity



CONTROL PANEL



BATTERY



HIGH DUMP



**INNOVATIONS**




SOFT  
CLEANING  
SURFACE



**SLS™**  
SELF-LEVELLING  
SYSTEM

SLS™ System can be electric or mechanical and allows great cleaning performances thanks to a constant pressure on the floor.

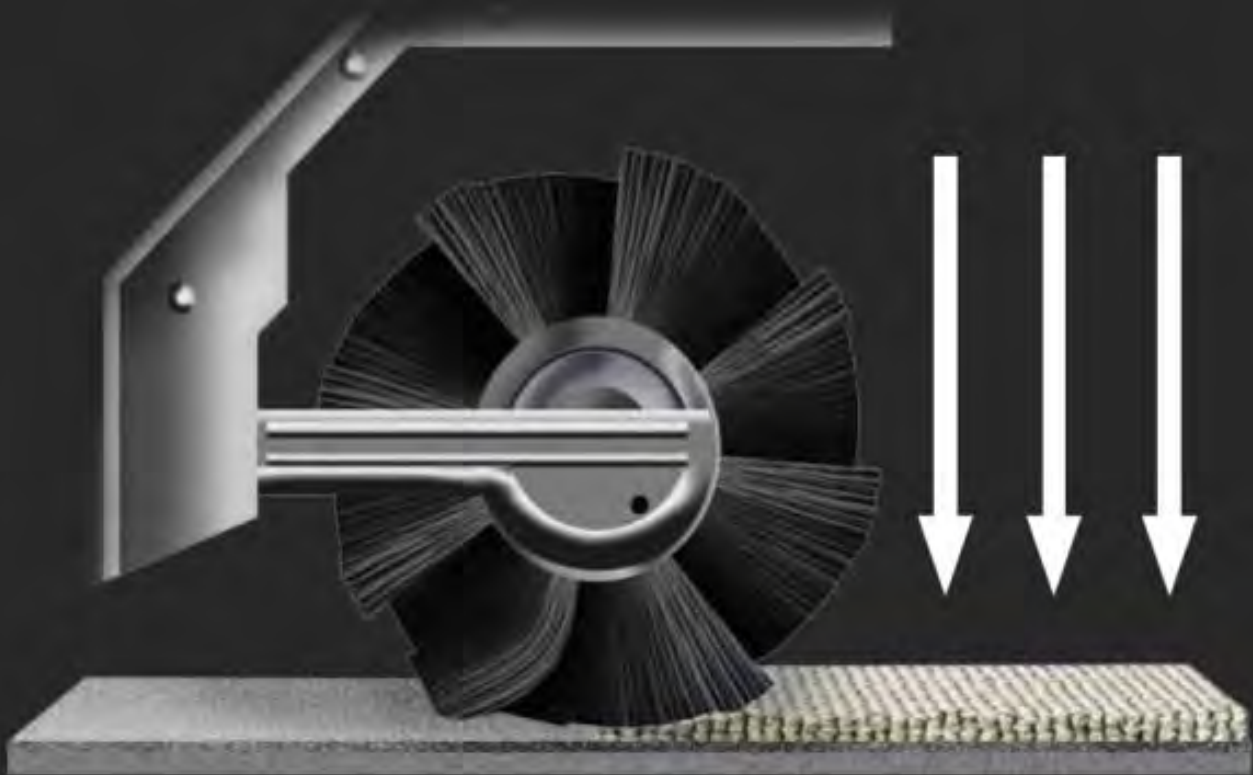

# 1280

.01 HIGH DUMP OF DEBRIS



.02 SELF-LEVELING BRUSH

.03 LARGE HOPPER CAPACITY

## Other Features

- Main brush with special "V" shape collects full amount of debris.
- Self-leveling mechanical system provides even pressure between brush and floor
- Dust micro-filtration (up to 3 micron) through special fabric filter
- Special flap is activated from the driver's seat for large debris collection
- Protected and waterproof control panel
- Easy to use due to intuitive commands
- Deactivation and restart of working functions simply by traction pedal
- Long life polyester washable filter.
- Filter intervals can be programmed through electronic board
- Main brush replacement without tools
- Heavy duty motors equipped with preventative protection systems

# 1280

## 1280 RIDER

Max working width	in/ mm	47"/ 1200 mm
Main brush width	in/ mm	26"/ 680 mm
Highest productivity	ft <sup>2</sup> /h - m <sup>2</sup> /h	68,000 ft <sup>2</sup> / 6,320m <sup>2</sup>
Dirt container volume	gal	28 gal/ 67 l
Max speed	Mph/ kph	4.0 mph/ 6.5 kph
Dimensions	inches	64 x 36 x 48
Power supply	V	24 V
Filtering surface	ft <sup>2</sup> / m <sup>2</sup>	22 ft <sup>2</sup> / 2 m <sup>2</sup>
Filter shaker		Electric motor
Noise level	dB	70 dB

## AVAILABLE ACCESSORIES

**6V 240 AH BATTERY**  
6V240E



**12V 230 AH BATTERY**  
12V100-AGM



**CHARGER WET/GEL**  
BACA00136



**BATTERY WATERING SYSTEM**  
CR-BWS-L-4



## GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft <sup>2</sup> / h	Maximum Theoretical ft <sup>2</sup> /charge	Ft <sup>2</sup> charge efficiency (70%)
1280	240 ah Battery	4.0	68,102	272,408	190,685
1280	225ah AGM Battery	4.0	68,102	272,408	190,685



**IPC Eagle Corporation**  
3650 Dodd Road Eagan, MN 55123  
800-486-2775  
info@ipceagle.com