

# Working Hard for the Hard Working®

CrownMats.com | 1-800-MAT-LINE | 48 HOUR SHIPPING

## CROWN

MATting TECHNOLOGIES

## Ergo X-Treme

SKU: 777

OILY AREA | PREMIUM

Ergo X-Treme™ is our safest and toughest ergonomic solution for harsh environments. As a performance collection product, this mat offers maximum durability in wet or oily environments. Modular tiles offer flexibility to reconfigure the mat to accommodate changing work environments. Durable mat with an efficient drainage system for good adherence on oily surfaces.

### FEATURES

- 100% oil and grease proof molded nitrile matting
- Aggressively patterned top surface ensures maximum foot traction in slippery environments
- Modular tiles can be assembled to fit any area
- Safety ramps available with or without grit

### SKU

- 775 Solid Top
- 776 Drain Through
- 777 Grit Safe Drain Through
- 779 Grit Safe Large Drain Through


### APPLICATIONS

Provide a heavy-duty solution for oily areas e.g.: Factory, Machine shop, Auto manufacturer, Power transmission facility

Anti-fatigue: 30 out of 100  
Durability: 100 out of 100  
Traction: 100 out of 100

\*Sold in full cases of eight tiles only. Pre-assembled workstations have borders on both of the shorter-dimension sides, and one of the longer-dimension sides.

Custom mats can be ordered in sizes up to 9' x 21'. Workstations can be produced in 1" increments, not including any optional yellow custom edging. Addition of edging to a custom mat to any side increases the size of the mat by 3".

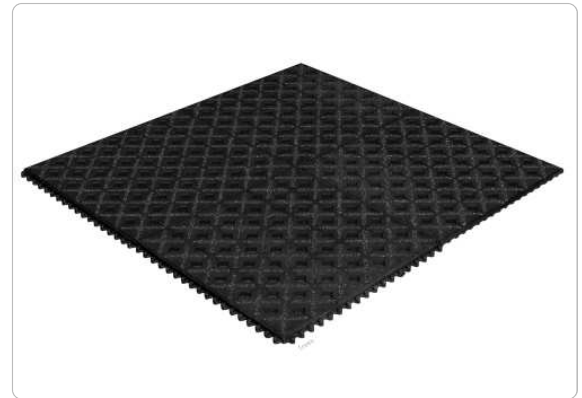

## Additional Information

<b>Sizes</b>	18" x 18"
<b>Pattern</b>	Solid Top, Drain Through, Grit-Safe Drain Through, Grit-Safe Large Drain Through
<b>Colors</b>	Black
<b>Thickness</b>	3/4"
<b>Total Customization</b>	Yes
<b>Warranty</b>	1 year

## Technical Data

<b>Material:</b>	100% Nitrile rubber
<b>Electrical Properties:</b>	(10 <sup>9</sup> ohms per sq.) ASTM D-257
<b>Coefficient of friction:</b>	# 775 –Solid Top - .965 per ASTM D1677# 776 –Drainage Top - .965 per ASTM D1677# 777 –Drainage Top with Grit-Safe 1.08 per ASTM D1677
<b>Product Weight:</b>	41 lbs/case
<b>Flammability:</b>	D.O.C.- F.F.-1-70 (Pill Test)

