


Quick Start Guide

98132 Marathon 350



1. Assembly

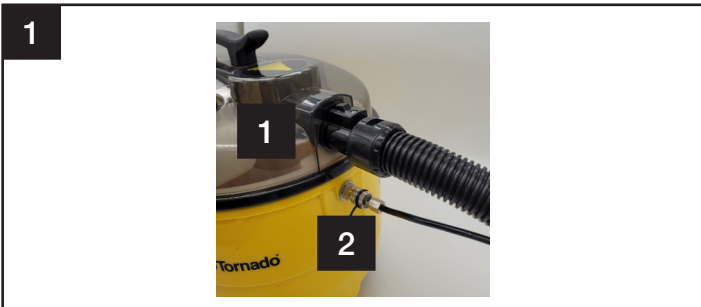


Connect the vacuum hose (1) onto the vacuum hose inlet and the high-pressure spray hose (2) onto the solution outlet.



Connect the vacuum hose and the high-pressure spray hose to the carpet cleaning wand (1) or the upholstery tool (2).

2. Operating Instructions

1



Fill the removable solution tank (1) with detergent and water up to the full line. Use the correct dilution rate for the detergent. Never over fill.

2

1




Fill the anti-foam tank (1) with an appropriate de-foamer solution.

Important – Always use low foaming carpet cleaning chemicals. If using foaming carpet cleaning chemical, or if foam develops due to residues in the carpet, ensure that an appropriate de-foamer is used in the anti-foam tank. Incorrect chemicals could cause damage to the carpets being cleaned or cause the machine to malfunction

3


1



Connect the cable to main power and ensure the slider on top of the trigger unit (1) is in the closed position.

4


1 **2**



Switch on the vacuum (1) and/or spray (2).

5

1



Squeeze the trigger (1) to spray solution onto the carpet/upholstery. Maintain a constant pressure of the wand/tool onto the surface to be cleaned.

3. Additional Parts Required

There are no additional part required.