



AUTOMATIC SCRUBBERS - WALK BEHIND

CT46

The CT45 and CT46 offer an innovative design that ensures maximum productivity in a compact scrubber. Their uniquely designed handles are easy to use and allow the machines to be highly maneuverable while their ergonomic designs allow the operator to adjust the height accordingly.

MAX PRODUCTIVITY

17,000 ft²/h

**BATTERIES
RUNNING TIME**

2.0

KEY SPECS

11/12 gal

20" brush drive

MOST FREQUENT USE



FOLDABLE HANDLE



SPIN-ON, SPIN-OFF BRUSH



EASY TO USE CONTROLS

INNOVATIONS






ECO SELECT



Maintenance Costs

SAVE UP TO 20%

+20%

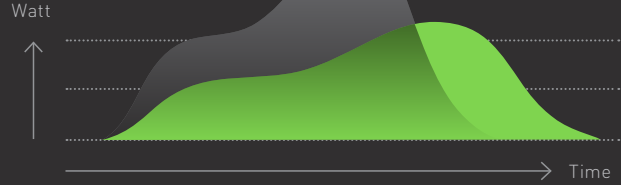

Eco Select permits to decrease energy consumption and increase running time of 20% in every day cleaning operations. Noise level is down to 62Db allowing cleaning operations even in sensitive areas. Programmed maintenance is longer with consequent cost reduction.



SLS™ SELF LEVELING SYSTEM

MECHANICAL SYSTEM



- The brush pressure with self-leveling and self-adjusting head, allows a perfect fit between the brush and floor
- System available as mechanical, electro mechanical or electronic according to machine models



FOLDABLE HANDLE



Handle Adjustment Angle

180°

The adjustable multi-position handle on CT46 allows many applications with maximum comfort to the operator, even in narrow areas.



CT46



Other Features

- Brush replacement without tools
- Squeegee blades can be used on four sides before needing replacements
- Easy access to internal compartments
- Tanks and surrounding body in high density polyethylene
- Oil bath reduction gear box
- Brush head and squeegee system designed to absorb harsh impact
- Panel control switches protected against water and humidity
- Central Flow System
- Great maneuverability due to optimum weight distribution

CT46 TECHNICAL SPECIFICATIONS

CT46 BRUSH DRIVE

Code		CT46
PRODUCTIVITY		
Max theoretical productivity	ft ² /h - m ²	17,000/ 1,750 m ²
Cleaning path	in/mm	20 in/ 500 mm
Squeegee width	in/mm	20 in/ 500 mm
Water tank capacity	Gal/ l	11/12 gal/ 40/45 l
Max running time	min	120
Voltage	V-Ah	24V (2x12) AGM
Installed power	W	550
Max Speed		2.2 mph/ 3.5 kph
Brush pressure	lbs/ kg	55 lbs/ 25 kg
Weight	lbs/ kg	243 lb/ 110 kg
Dimensions	in	33 x 22 x 48 in

AVAILABLE ACCESSORIES

PAD DRIVER
SPPV01335



NYLON BRUSH
SPPV01332



NATURAL BRISTLE BRUSH
SPPV01495



CHEM DOSE KIT
KTRIO4804



12 V 145 AH
12V145



12V140 AGM
12V140-AGM



12V115 AH
12V115



12V115 AGM
12V115-AGM



12V 100 AGM
12V100-AGM



SQUEEGEES
PMVR01534 (COMPLETE)
MPVR06287 (FRONT)
MPVR06288 (REAR)



CT46B50

	Description	Continuous run-time	Theoretical ft ² / h	Maximum Theoretical ft ² /charge	Ft ² charge efficiency (70%)
CT46B50	Brush Drive, 115ah battery	1.8 h	16,811	30,260	21,182
CT46B50	Brush Drive, 145ah battery	2.3 h	16,811	38,666	27,066
CT46B50	Brush Drive, 100ah AGM battery	2.0 h	16,811	33,623	23,536
CT46B50	Brush Drive, 115ah AGM battery	2.5 h	16,811	42,028	29,420
CT46B50	Brush Drive, 140ah AGM battery	3.5 h	16,811	58,840	41,188



IPC Eagle Corporation
3650 Dodd Road Eagan, MN 55123
800-486-2775
info@ipceagle.com