




Tel	(305) 468-1978	3FM12A 6V12AH	Page	Page 1 of 3
Fax	(305) 468-1995		Date	2/9/2017

I · Structure

The battery consists mainly of positive plates, negative plates, separators, electrolyte, valves, a container and a cover.

The electrolyte is absorbed in both positive/negative plate and separators.

unit:mm (inch)

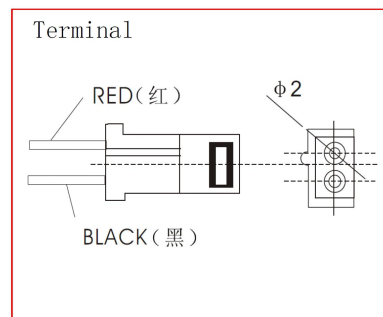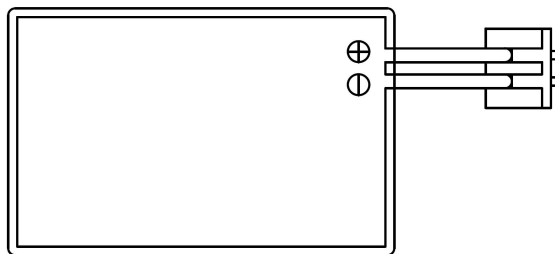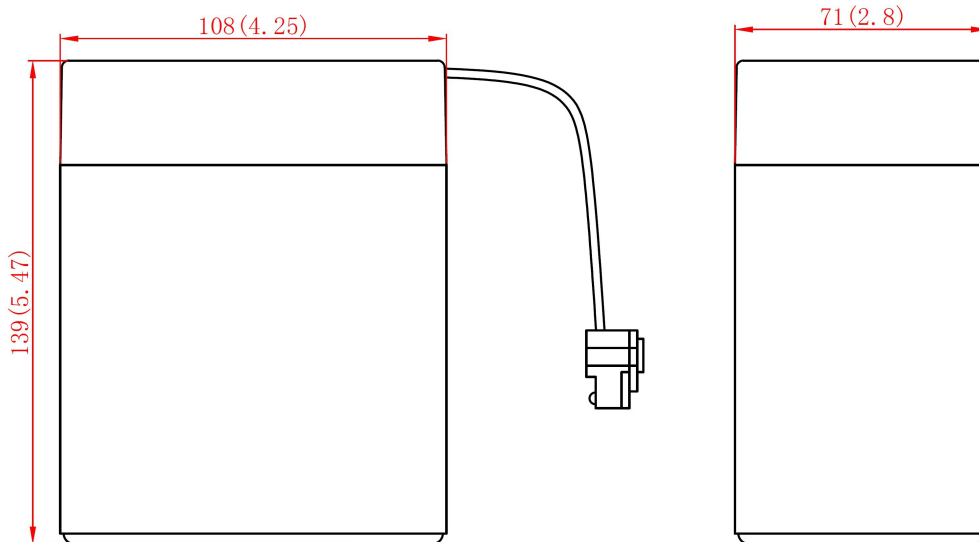

II. Performance Specifications

Nominal Voltage (V).....6 volts (3cells in series);

Nominal Capacity (AH)

20 Hour rate F.V.(1.75V/cell) (0.60A to 5.25volts)	12.0AH;
10 Hour rate F.V.(1.75V/cell) (1.14A to 5.25volts)	11.4AH;
5 Hour rate F.V.(1.75V/cell) (2.04A to 5.25volts)	10.2AH;
1 Hour rate F.V.(1.75V/cell) (6.72A to 5.25volts)	6.720AH;
7 Min rate F.V.(1.6V/cell) (36.0A to 4.8volts)	4.2AH;

Approximate Weight**2.3Kg;**

Terminal **J connector;**

Maximum Discharge Current For 5 sec. (A) **180A;**

Maximum Charge Current (A)..... **3.6A;**

Tel	(305) 468-1978	3FM12A 6V12AH	Page	Page 2 of 3
Fax	(305) 468-1995		Date	2/9/2017

Ambient Temperature

Charge0°C (32°F) ~ 40°C (104°F);
 Discharge -20°C (-4°F) ~ 50°C (122°F);
 Storage -20°C (-4°F) ~ 40°C (104°F);

Expected Life for Standby Use at 20°C 3~5 years;





CaseABS;

Dimension (mm/inch)

Length (±1.5mm) 108;
 Width (±1.5mm) 71;
 Container Height (±2mm)139;
 Total Height (±2mm)139;

Application.....UPS, Laboratory Equipment, Toy-Cars, Power Packs, Fishing Lights.

Battery Characteristics Graph

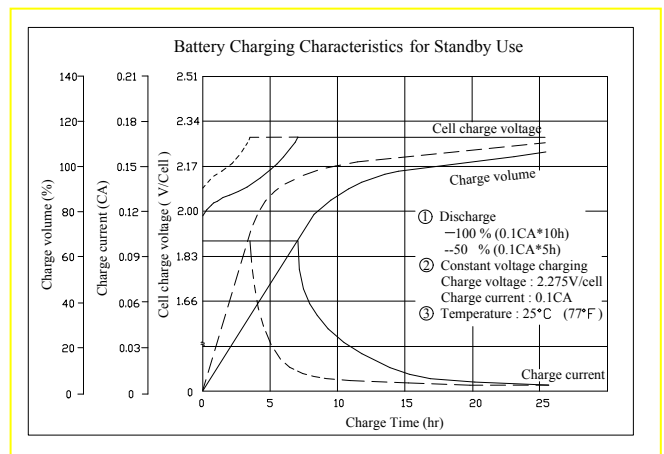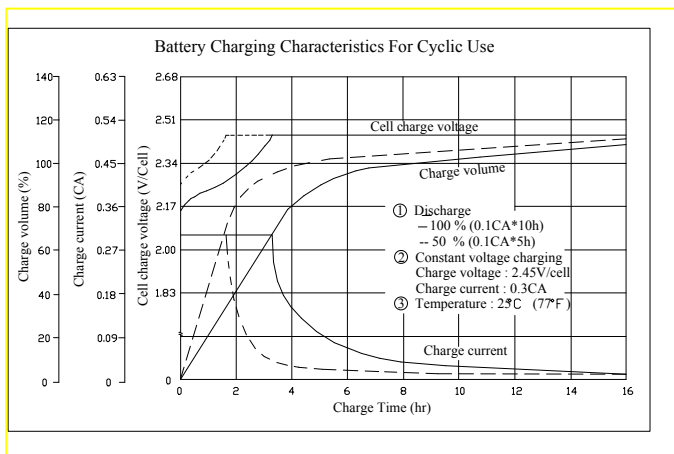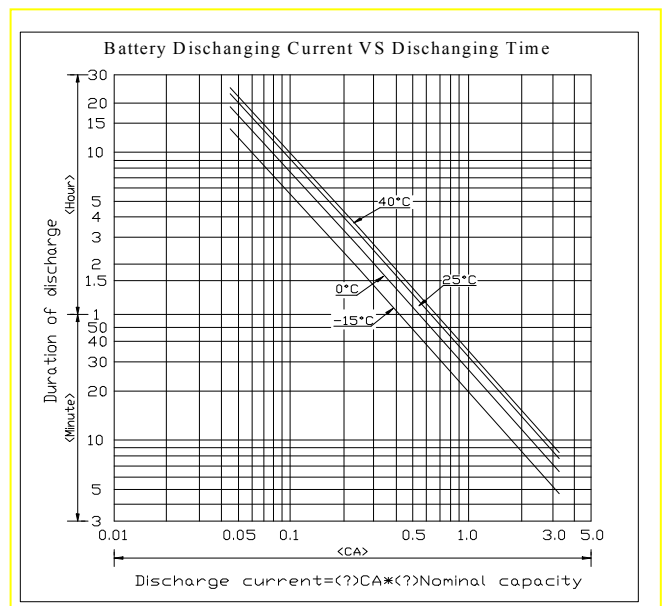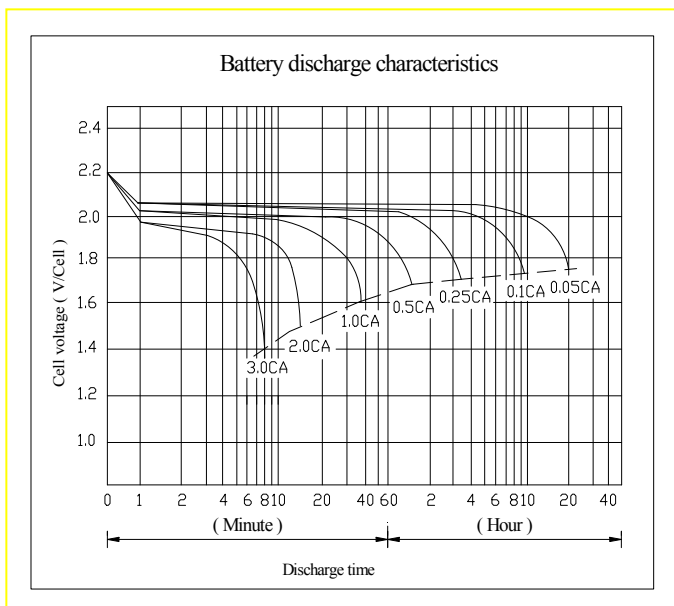

Tel	(305) 468-1978	3FM12A 6V12AH	Page	Page 3 of 3
Fax	(305) 468-1995		Date	2/9/2017

Effect of temperature on capacity (10HR)

Temperature	Dependency of Capacity (10HR)
40°C	102%
25°C	100%
0°C	85%
-15°C	65%

Self-discharge Characteristics

Aging Time	Residual Capacity
3 Months	91%
6 Months	82%
12 Months	64%

Note: The data mentioned above just for full charged battery.

III · Charging Procedure

Application	Charging method	Charge voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C · cell)	Max. charging current (CA)	Charging time 0.15CA, 25°C(h)		Temp (°C)
					100% DOD	50% DOD	
For standby power source	Constant voltage charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40°C (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

Note:

Temperature compensation of charging voltage is not needed, when using the batteries within 15°C to 35°C range

Manufacturer		Customer	
Drafted by	Approved by	Audited by	Approved by