


Tel	(305) 468-1978	6GFM35 12V35Ah	Page	Page 1 of 3
Fax	(305) 468-1995		Date	2/15/2017

I • Structure

The battery consists mainly of positive plates, negative plates, separators, electrolyte, valves, a container and a cover.

The electrolyte is absorbed in both positive/negative plate and separators.

unit:mm(inch)

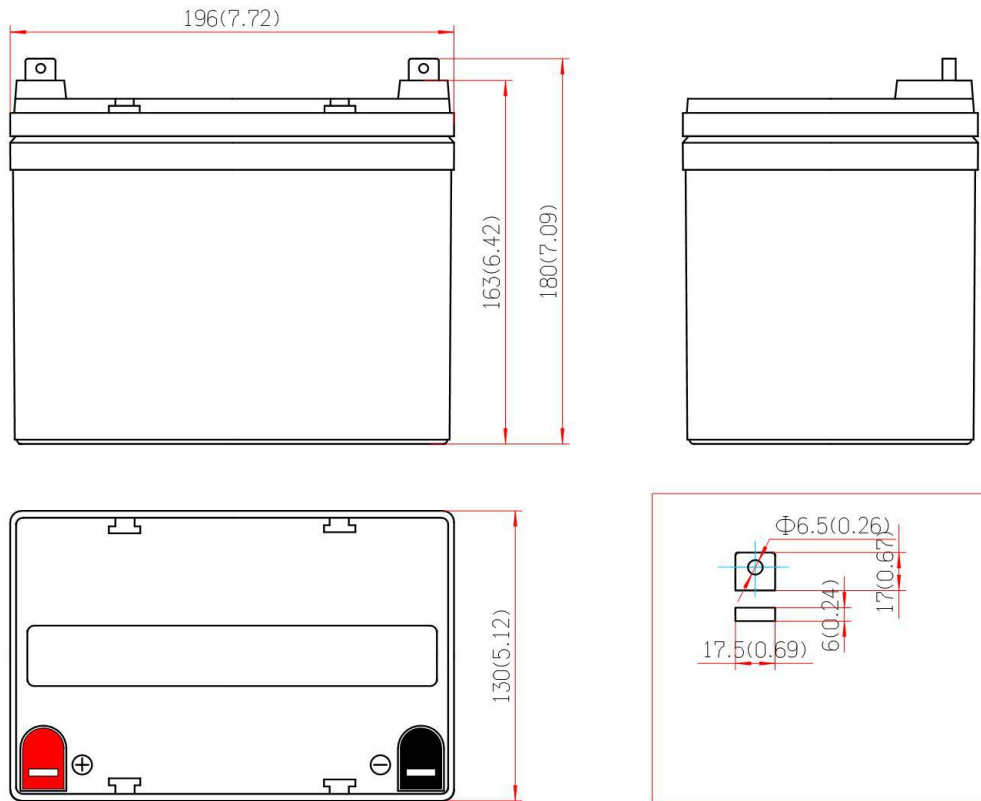

II. Performance Specifications

Nominal Voltage (V).....12 volts (6 cells in series);

Nominal Capacity (AH)

- 20 Hour rate F.V.(1.75V/cell) (1.75A to 10.5volts) 35.0AH;
- 10 Hour rate F.V.(1.75V/cell) (3.325A to 10.5volts) 33.25AH;
- 5 Hour rate F.V.(1.75V/cell) (5.95A to 10.5volts) 29.75AH;
- 3 Hour rate F.V.(1.75V/cell) (8.75A to 10.5volts) 26.25AH;
- 27 Min rate F.V.(1.6V/cell) (35.0A to 9.6volts) 15.75AH;
- 7 Min rate F.V.(1.6V/cell) (105A to 9.6volts) 12.25AH;

Approximate Weight10.2 Kg;

Terminal L1(M6 Bolt & nut Lead terminal);

Maximum Discharge Current For 5 sec. (A)..... 525A;

Maximum Charge Current (A).....10.5A;

Tel	(305) 468-1978	6GFM35 12V35Ah	Page	Page 2 of 3
Fax	(305) 468-1995		Date	2/15/2017

Ambient Temperature

Charge0°C (32°F) ~ 40°C (104°F);
 Discharge -20°C (-4°F) ~ 50°C (122°F);
 Storage -20°C (-4°F) ~ 40°C (104°F);

Expected Life for Standby Use at 20°C 3~5 years;





Case ABS;

Dimension (mm/inch)

Length (±1.5mm) 196/7.72;
 Width (±1.5mm) 130/5.12;
 Container Height (±1.5mm) .. 163/6.42;
 Total Height (±1.5mm)..... .180/7.09;

Application.....UPS, Laboratory Equipment, Toy-Cars, Power Packs, Fishing Lights.

Battery Characteristics Graph

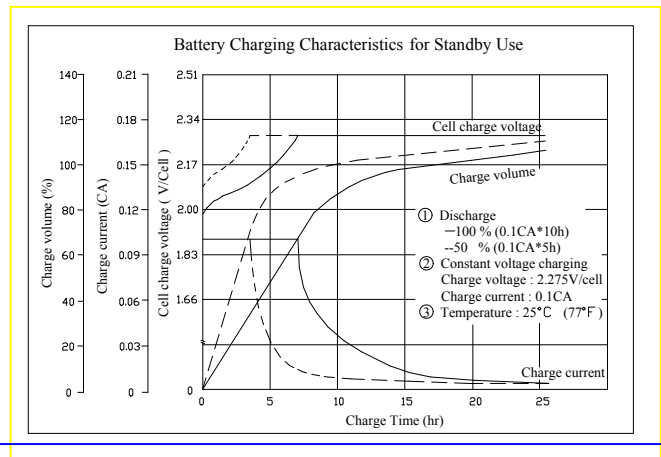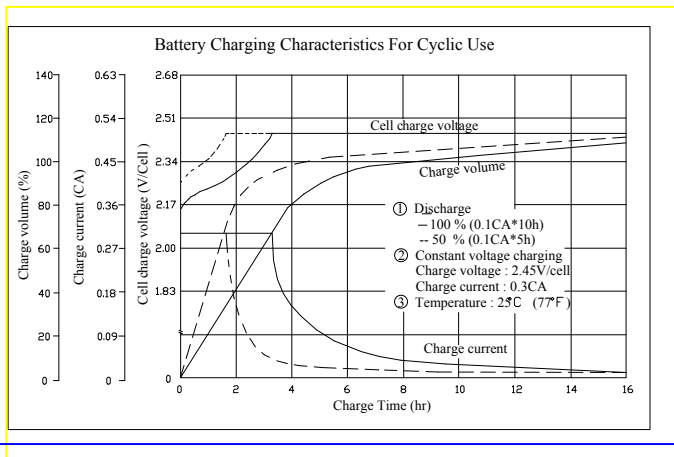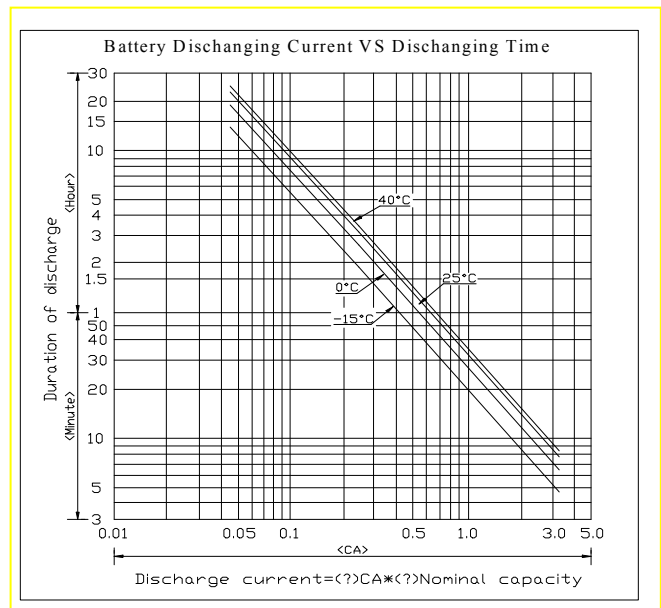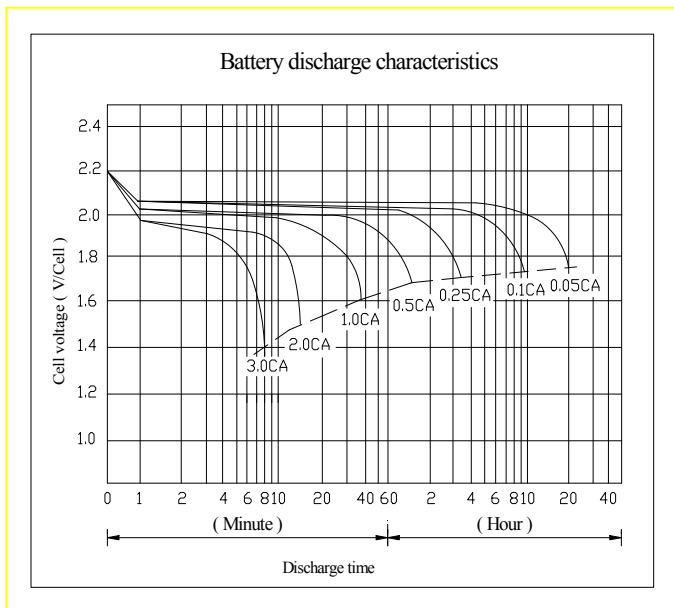

Tel	(305) 468-1978	6GFM35 12V35Ah	Page	Page 3 of 3
Fax	(305) 468-1995		Date	2/15/2017

Effect of temperature on capacity (20HR)

Temperature	Dependency of Capacity (20HR)
40°C	102%
25°C	100%
0°C	85%
-15°C	65%

Self-discharge Characteristics

Aging Time	Residual Capacity
3 Months	91%
6 Months	82%
12 Months	64%

Note: The data mentioned above just for full charged battery.

III · Charging Procedure

Application	Charging method	Charge voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C · cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C(h)		Temp (°C)
					100% DOD	50% DOD	
For standby power source	Constant voltage charging (with current restriction)	2.25~2.30	-3	0.20	24	20	0~40°C (32~104°F)
For cycle service		2.40~2.50	-4	0.20	16	10	

Note:

Temperature compensation of charging voltage is not needed, when using the batteries within 15°C to 35°C range.