


Toggle Clamp Replacement

This procedure can be used to replace the toggle clamps on the G9, G20 and G33.



1. Remove the 4 screws securing the toggle clamp to the smoker.

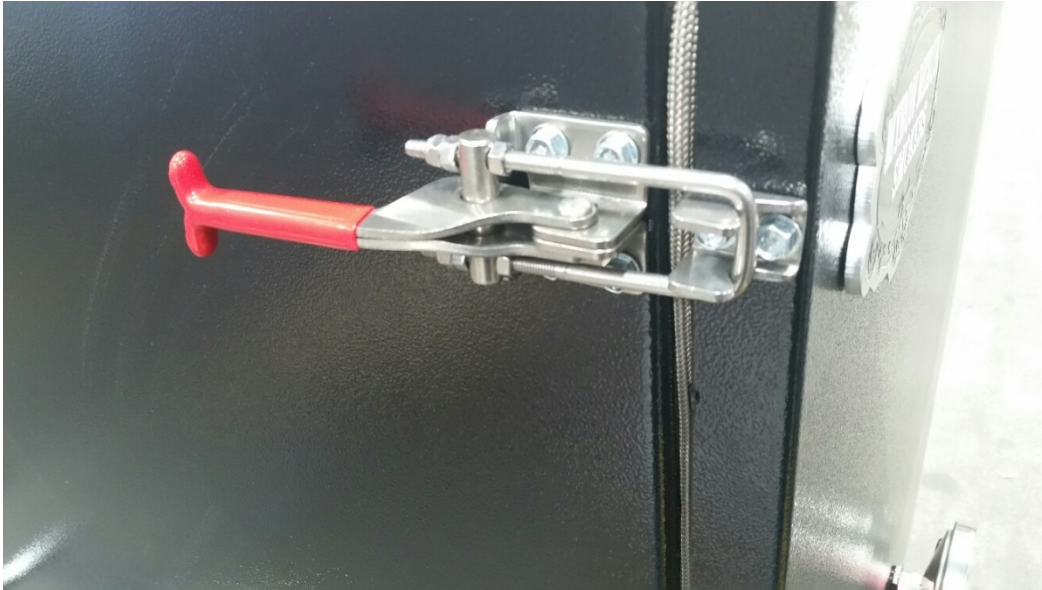

2. Remove clamp from smoker



3. If catch needs to be replaced, remove the 2 screws securing it to the door. If the catch does not need replacing, skip to step 6.



4. Remove catch from door.



5. Install new catch and tighten screws.



6. Install new Clamp and Tighten screws.



7. Test operation and adjustment of clamp. Adjust clamp if necessary.

