


SMALL PISTOL SAFE PART NUMBER: SPS-01

HOW TO CHANGE THE COMBO:

- 1) Turn the three wheel combination to factory code: 0-0-0 and turn the knob clockwise to the open position.
- 2) LEAVE THE KNOB TURNED.
- 3) Open the lid. On the underside of the lid, move the lever from the “A” position to the “B” position.
- 4) Set your personal combination by turning each of the three wheels to your desired number.
- 5) With the lid still open, turn the knob to the locked (counter-clockwise) position.
- 6) Return the lever on the underside of the lid from “B” to “A”.
- 7) Your new combination is set.

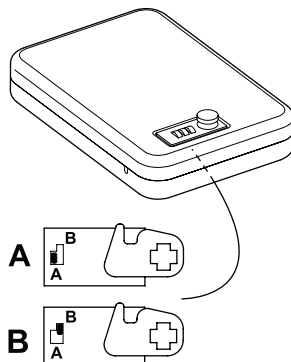

SECURING THE SAFE

NOTE: The SPS-01 should be installed in a dry and secure area. Failure to secure the SPS-01 to a fixed object will compromise the safety and the security of the safe.


CAUTION: KEEP SPS-01 OUT OF REACH OF CHILDREN.

There are two ways to secure the SPS-01:

1) Using the supplied cable:

To secure the SPS-01 to a fixed object:

- a) Open your safe (see above instructions) and keep it in the open position.
- b) Loop the **small end** of the cable around the fixed object and then **through** the **large end** of the cable.
- c) Place the small end of the cable into the notch of the open safe.
(*Make sure the metal stud on the cable is inside the safe.*)
- d) Close and lock the safe.



2) Using the pre-drilled mounting holes: (*mounting hardware NOT included*)

Your SPS-01 has two pre-drilled mounting holes in the bottom of the safe.

- a) Open your safe (see above instructions).
- b) Remove the inner foam padding.
- c) Locate the holes.
- d) Place the safe in the desired location.
- e) Install the proper hardware for the surface material you are mounting to.
(*mounting hardware NOT included*)