

Assembly Instruction Manual




List of Items




Assembly time : Approx 20 mins.




(a)
Allen key
1 No.




(b)
Allen bolts (Large)
6 Nos.
(attached in material)




(c)
Allen bolts (Small)
22 Nos.
(attached in beech rods)



(d)
Knob Screw
2 Nos.

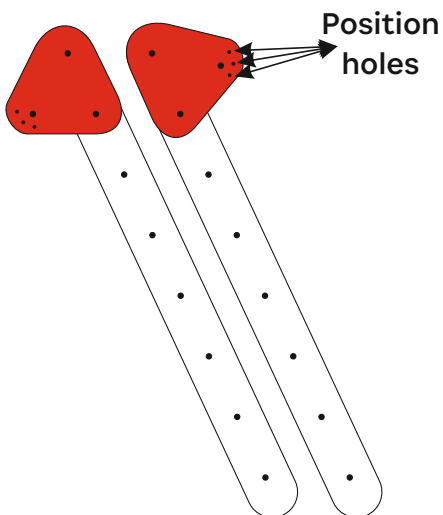

(A1-A2)
Side Frame
with Top Triangle
2 Nos.

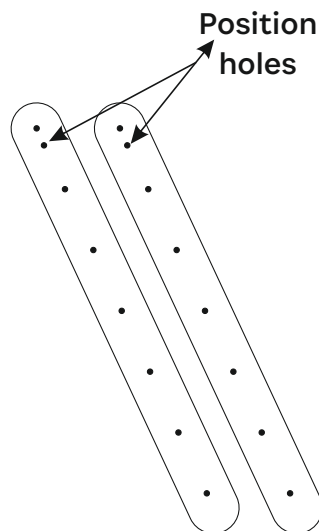


(B1-B2)
Side Frame
2 Nos.



Beech Wood Rods
15 Nos.

Step 1

Attach the beech wood rods to the red triangle-large frame structure. Use large allen bolts in the red triangle area (2 Large allen bolts on each side). To attach the remaining 6 beech wood rods use small allen bolts.


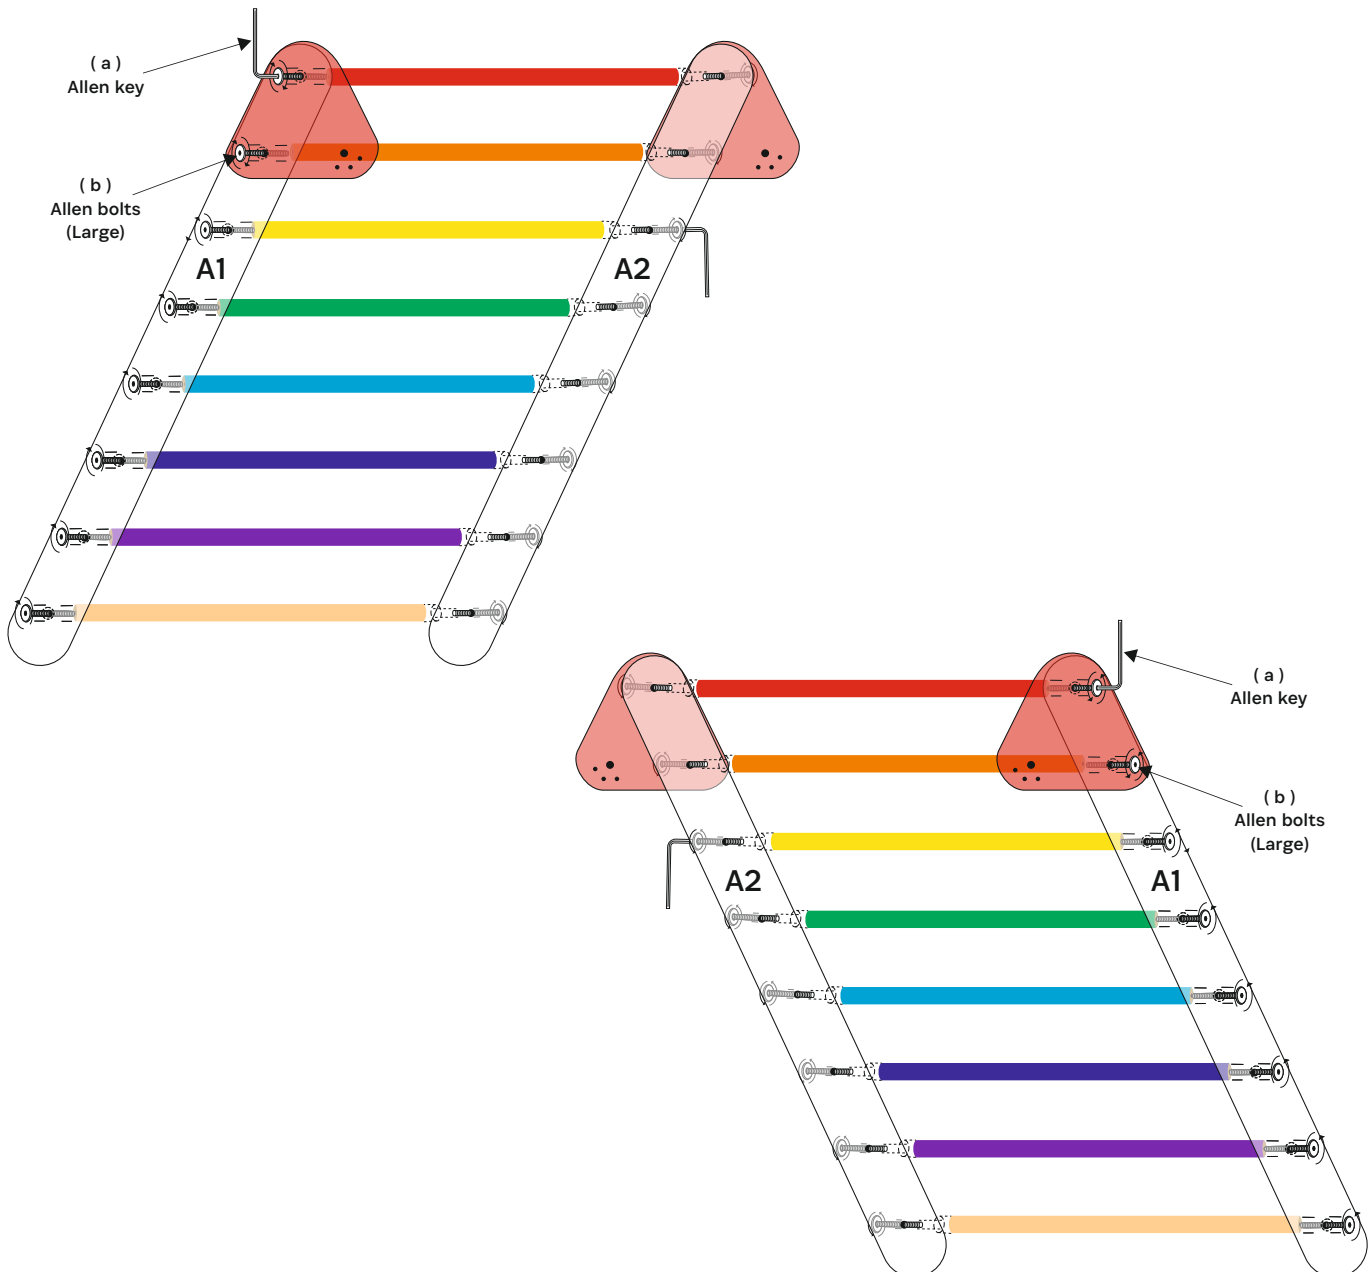


Pikler Triangle

Assembly Instruction Manual

Step 2

Attach the small frame and beech wood rods with the red triangle with allen bolts. Large allen bolts should be used in the red triangle and in all other beech wood rods, small allen bolt should be used.

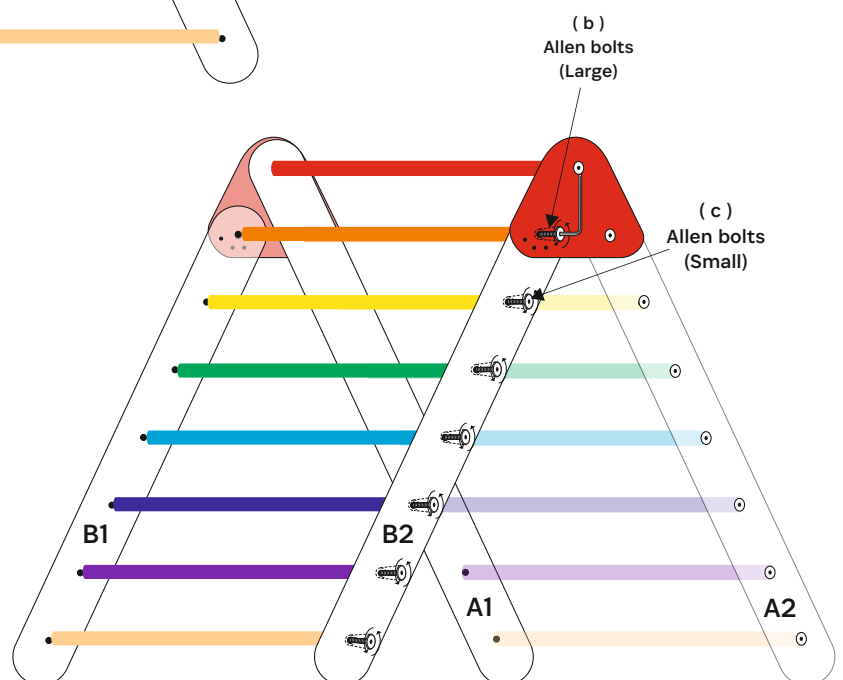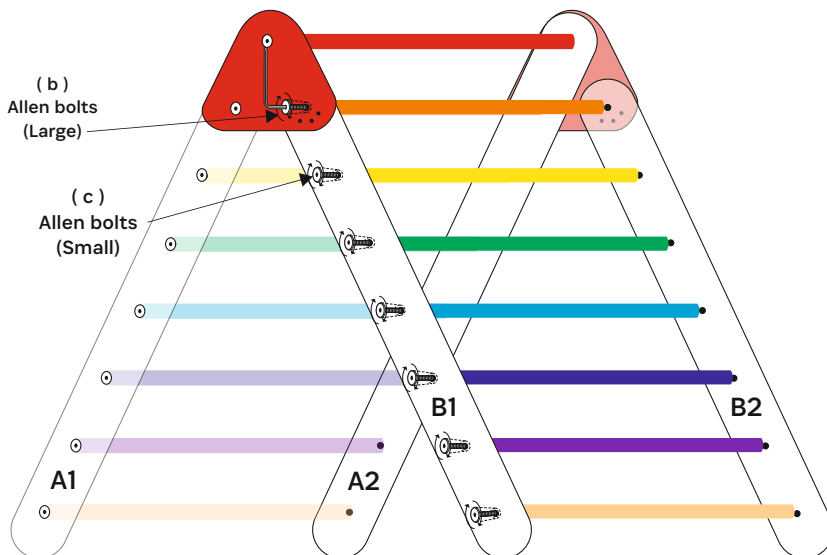

Step 3

You will find three position holes in the red triangle. Position the side frame in such a way that the position hole in the side frame and red triangles aligns. Use the black screw knob to screw it to the position.

Three position holes in the red triangle will help you to position the pikler triangle in three different angles.

