


TIMBER VAULTS


Concealment Shelf Installation Instructions

Included Parts:

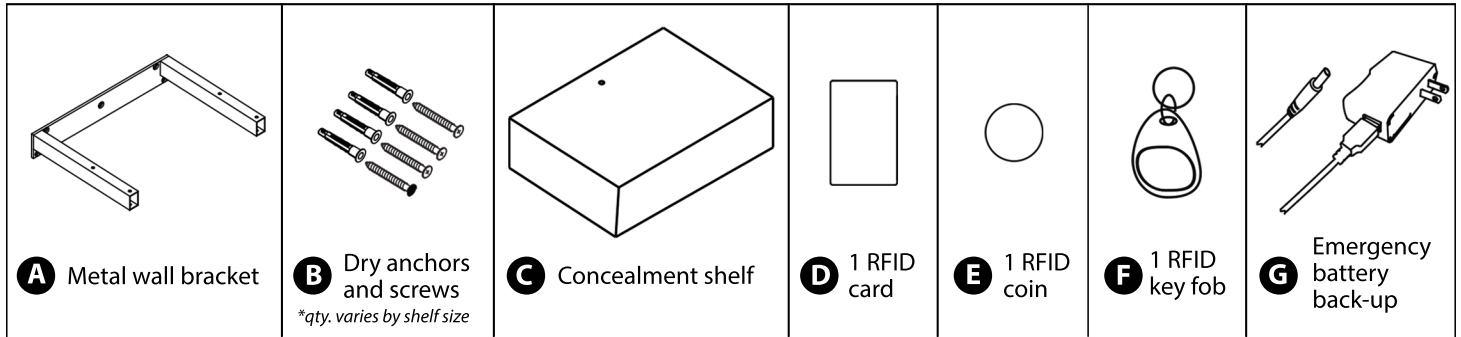


Installation


1. Mount the metal wall bracket (A) to your wall using the provided hardware (B) and ensure that it is level. If possible, mount at least one screw (B) on the left and one on the right directly into the wall stud.

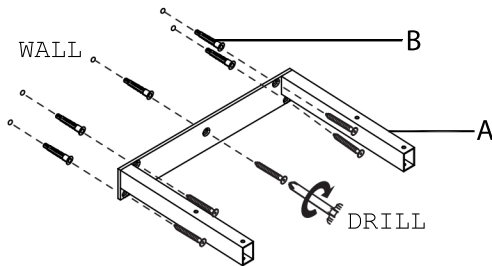

2. Slide the shelf (C) onto the metal tubes (A).

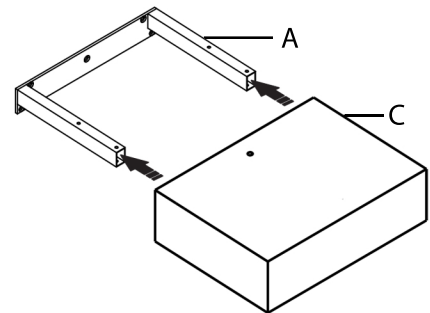


3. Optional: Install two phillips wood screws (B) through the interior metal tubes (A) into the shelf ceiling. This locks the shelf in place on the bracket.



4. Before closing the shelf, insert new 4x AAA batteries into the lock and install the cover. The lock will beep once the batteries are properly installed.

! If it beeps repeatedly when you swipe the card, the batteries are weak and must be replaced.



Tip: Install a Timber Vault motion-activated light to your shelf to avoid fumbling around in the dark when accessing your firearm. Simply attach the light to the interior of your shelf using an adhesive strip.



WARNING: To open and close the shelf, you must use an RFID device. Failure to do so will cause the lock to jam, and you will be locked out.

Operating the Lock

1. Swipe your RFID device (**D, E, or F**) over the surface of the lock. The lock will beep once and then open. Depending on the weight, you may need to press the bottom of the shelf up to fully unlock.
2. Swipe your RFID card (**D**) again, the lock will beep once, and you can close the shelf.

For more help installing your Timber Vault, check out the instructional videos on our website. Simply select "Videos + Instructions" from the menu to access the guides.